



DRV11873 12V、三相无传感器、无刷直流 (BLDC) 电机驱动器

1 特性

- 输入电压范围：5V 至 16V
- 六个具有 1.5V 持续输出电流的集成金属氧化物半导体场效应晶体管 (MOSFET)
- 总驱动器 H+L $R_{DS(on)}$ ：450m Ω
- 无传感器私有 BMEF 控制系统配置
- 150°整流
- 同步整流脉宽调制 (PWM) 操作
- FG 和 RD 开漏输出
- 适合外部使用的 5V LDO，电流高达 20mA
- 7kHz 至 100kHz 的 PWM_{IN} 输入
- 过电流保护，限值可通过外部电阻调节
- 锁定检测
- 电压浪涌保护
- 欠压闭锁 (UVLO)
- 热关断

2 应用范围

- 电器冷却风扇
- 台式机冷却风扇
- 服务器冷却风扇

3 说明


DRV11873 是一款具有集成功率 MOSFET 的三相无传感器电机驱动器，连续驱动电流达 1.5A，峰值驱动电流高达 2A。DRV11873 专为风扇电机驱动应用设计，噪声低且所需的外部组件数量少。DRV11873 具有内置过电流保护，无需外部电流感测电阻。同步整流运行模式可提高电机驱动器应用的效率。DRV11873 通过开漏输出端输出 FG 和 RD 以指示电机状态。该器件实现了适合三相电机的 150° 无传感器反电动势 (BEMF) 控制方案。DRV11873 采用高效散热型 16 引脚 TSSOP 封装。额定工作温度为 -40°C 至 125°C。

器件信息⁽¹⁾

| 器件型号 | 封装 | 封装尺寸（标称值） |
|----------|-------------|-----------------|
| DRV11873 | HTSSOP (16) | 4.40mm × 5.00mm |

(1) 要了解所有可用封装，请见数据表末尾的可订购产品附录。

4 简化电路原理图

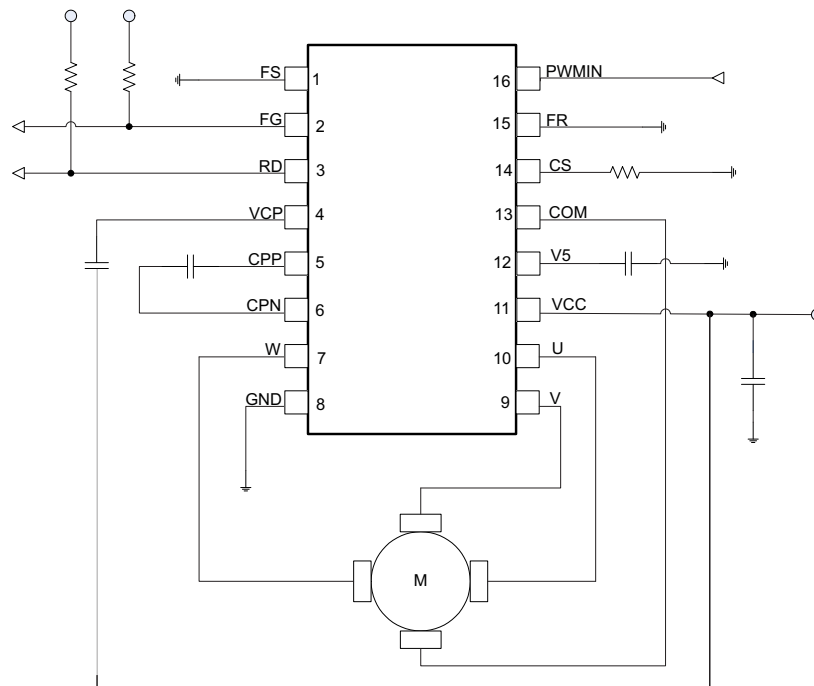

目录


| | | | | | |
|----------|--|----------|-----------|---|-----------|
| 1 | 特性 | 1 | 8.2 | Functional Block Diagram | 9 |
| 2 | 应用范围 | 1 | 8.3 | Feature Description | 10 |
| 3 | 说明 | 1 | 8.4 | Device Functional Modes | 11 |
| 4 | 简化电路原理图 | 1 | 9 | Application and Implementation | 13 |
| 5 | 修订历史记录 | 2 | 9.1 | Application Information | 13 |
| 6 | Pin Configuration and Functions | 3 | 9.2 | Typical Application | 13 |
| 7 | Specifications | 4 | 10 | Power Supply Recommendations | 15 |
| 7.1 | Absolute Maximum Ratings | 4 | 11 | Layout | 15 |
| 7.2 | Handling Ratings | 4 | 11.1 | Layout Guidelines | 15 |
| 7.3 | Recommended Operating Conditions | 4 | 11.2 | Layout Example | 15 |
| 7.4 | Thermal Information | 5 | 12 | 器件和文档支持 | 16 |
| 7.5 | Electrical Characteristics | 6 | 12.1 | 商标 | 16 |
| 7.6 | Typical Characteristics | 7 | 12.2 | 静电放电警告 | 16 |
| 8 | Detailed Description | 9 | 12.3 | 术语表 | 16 |
| 8.1 | Overview | 9 | 13 | 机械、封装和可订购信息 | 16 |

5 修订历史记录

| Changes from Original (November 2012) to Revision A | Page |
|--|----------|
| <ul style="list-style-type: none"> 已添加处理额定值表，特性 描述部分，器件功能模式，应用和 实施部分，电源相关建议部分，布局部分，器件和文档支持部分以及机械、封装和可订购信息部分 | 1 |
| <ul style="list-style-type: none"> Changed f_{PWM} minimum value | 6 |

6 Pin Configuration and Functions

**PWP Package
16 Pins
(Top View)**

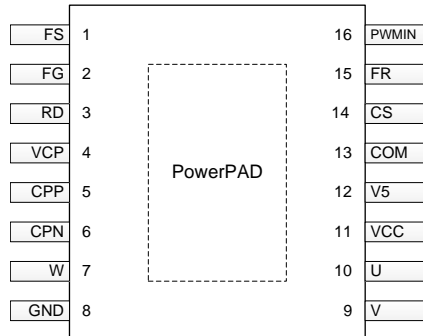

Pin Functions

| PIN | | I/O ⁽¹⁾ | DESCRIPTION |
|-------|-----|--------------------|---|
| NAME | NO. | | |
| FS | 1 | I | Motor parameter adjustment pin. Pull low for lower-speed motor and pull high for high-speed motor. |
| FG | 2 | O | Frequency generator output. The output period is equal to 6 electrical states (FG). |
| RD | 3 | O | In the lock condition, RD output is high through a pullup resistor to V _{CC} or 5 V. |
| VCP | 4 | O | Charge pump output |
| CPP | 5 | O | Charge pump conversion terminal |
| CPN | 6 | O | Charge pump conversion terminal |
| W | 7 | O | Phase W output |
| GND | 8 | — | Ground pin |
| V | 9 | O | Phase V output |
| U | 10 | O | Phase U output |
| VCC | 11 | I | Input voltage for motor and chip supply voltage |
| V5 | 12 | O | 5-V regulator output |
| COM | 13 | I | Motor common terminal input. If the motor does not have a common wire, see Application and Implementation for more details. |
| CS | 14 | I | Overcurrent threshold set-up pin. A resistor set-up current limit is connected between this pin and ground. The voltage across the resistor compares with the voltage converted from the bottom MOSFETs' current. If MOSFETs' current is high, the part goes into the overcurrent protection mode by turning off the top PWM MOSFET and keeping the bottom MOSFET on. $I_{limit}(A) = 6600 / R_{CS}(\Omega)$; Equation valid range: 500 mA < I _{limit} < 2000 mA |
| FR | 15 | I | Set high for reverse rotation. Set low or floating for forward rotation. |
| PWMIN | 16 | I | PWM input pin. The PWM input signal is converted to a fixed switching frequency on the MOSFET driver. |

(1) I = input, O = output, N/A = not available

7 Specifications

7.1 Absolute Maximum Ratings

over operating free-air temperature (unless otherwise noted)

| | | MIN | MAX | UNIT |
|-------------------------------|--------------------------------|------|-----|------|
| Input voltage ⁽¹⁾ | VCC | −0.3 | 20 | V |
| | CS | −0.3 | 3.6 | |
| | PWMIN, FS, FR | −0.3 | 6 | |
| | GND | −0.3 | 0.3 | |
| | COM | −1 | 20 | |
| Output voltage ⁽¹⁾ | U, V, W | −1 | 20 | V |
| | FG, RD | −0.3 | 20 | |
| | VCP | −0.3 | 25 | |
| | CPN | −0.3 | 20 | |
| | CPP | −0.3 | 25 | |
| | V5 | −0.3 | 6 | |
| T _J | Operating junction temperature | −40 | 125 | °C |

(1) Voltage values are with respect to the network ground terminal unless otherwise noted.

7.2 Handling Ratings

| | | | MIN | MAX | UNIT |
|--------------------|---------------------------|--|-------|------|------|
| T _{stg} | Storage temperature range | | −55 | 150 | °C |
| V _(ESD) | Electrostatic discharge | Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins ⁽¹⁾ | −4000 | 4000 | V |
| | | Charged device model (CDM), per JEDEC specification JESD22-C101, all pins ⁽²⁾ | −1000 | 1000 | |
| | | Machine model (MM) | −200 | 200 | |

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

7.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

| | | MIN | MAX | UNIT |
|----------------|--------------------------------|------|-----|------|
| Supply voltage | VCC | 5 | 16 | V |
| Voltage range | U, V, W | −0.7 | 17 | V |
| | COM | −0.1 | 17 | |
| | FG, RD | −0.1 | 16 | |
| | PGND, GND | −0.1 | 0.1 | |
| | VCP | −0.1 | 22 | |
| | CPP | −0.1 | 22 | |
| | CPN | −0.1 | 16 | |
| | V5 | −0.1 | 5.5 | |
| | PWMIN, FR, FS | −0.1 | 5.5 | |
| T _J | Operating junction temperature | −40 | 125 | V |

7.4 Thermal Information

| THERMAL METRIC ⁽¹⁾ | | DRV11873 | UNIT |
|-------------------------------|--|----------|------|
| | | PWP | |
| | | 16 PINS | |
| $R_{\theta JA}$ | Junction-to-ambient thermal resistance | 39.4 | °C/W |
| $R_{\theta JC(top)}$ | Junction-to-case (top) thermal resistance | 30.3 | |
| $R_{\theta JB}$ | Junction-to-board thermal resistance | 25.6 | |
| ψ_{JT} | Junction-to-top characterization parameter | 0.5 | |
| ψ_{JB} | Junction-to-board characterization parameter | 10.2 | |
| $R_{\theta JC(bot)}$ | Junction-to-case (bottom) thermal resistance | 3.6 | |

(1) For more information about traditional and new thermal metrics, see the *IC Package Thermal Metrics* application report, [SPRA953](#).

7.5 Electrical Characteristics

over recommended operating free-air temperature (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|-------------------------|-----------------------------------|---|-------|-------|-------|------|
| SUPPLY CURRENT | | | | | | |
| I _{VCC} | Supply current | T _A = 25°C; PWM = V _{CC} ; V _{CC} = 12 V | | 2.7 | 5 | mA |
| UVLO | | | | | | |
| V _{UVLO-th_r} | UVLO threshold voltage | Rise threshold, T _A = 25°C | | 4.3 | 4.6 | V |
| V _{UVLO-th_f} | UVLO threshold voltage | Fall threshold, T _A = 25°C | 3.9 | 4.1 | | V |
| V _{UVLO-thhys} | UVLO threshold voltage hysteresis | T _A = 25°C | 100 | 200 | 300 | mV |
| INTEGRATED MOSFET | | | | | | |
| R _{DS(on)} | Series resistance (H + L) | T _A = 25°C; V _{CC} = 12 V; V _{CP} = 19 V; I _{OUT} = 1.5 A | | 0.45 | 0.6 | Ω |
| PWM | | | | | | |
| V _{PWM-IH} | High-level input voltage | V _{CC} ≥ 4.5 V | 2.7 | | | V |
| V _{PWM-IL} | Low-level input voltage | V _{CC} ≥ 4.5 V | | | 0.8 | V |
| f _{PWM} | PWM input frequency | | 7 | | 100 | kHz |
| I _{PWM-SOURCE} | PWM source current | | 35 | 50 | 65 | μA |
| FG | | | | | | |
| I _{FG-SINK} | FG pin sink current | V _{FG} = 0.3 V | 5 | | | mA |
| I _{FG-short} | FG pin short current limit | V _{FG} = 12 V | | 20 | 25 | mA |
| RD | | | | | | |
| I _{RD-SINK} | RD pin sink current | V _{RD} = 0.3 V | 5 | | | mA |
| I _{RD-short} | RD pin short current limit | V _{RD} = 12 V | | 20 | 25 | mA |
| FR and FS | | | | | | |
| V _{FR-IH} | High-level input voltage | V _{CC} ≥ 4.5 V | 2.3 | | | V |
| V _{FR-IL} | Low-level input voltage | V _{CC} ≥ 4.5 V | | | 0.8 | V |
| V _{FS-th} | FS set threshold voltage | V _{CC} ≥ 4.5 V | 2.3 | | 0.8 | V |
| V5 | | | | | | |
| V5 | 5-V LDO voltage | V _{CC} = 12 V | 4.75 | 5 | 5.25 | V |
| I _{V5} | 5-V LDO load current | V _{CC} = 12 V | | 20 | | mA |
| LOCK PROTECTION | | | | | | |
| t _{LOCK-ON} | Lock detect time | FS = 0 | 0.875 | 1.25 | 1.625 | s |
| | | FS = 1 | 0.437 | 0.625 | 0.812 | |
| t _{LOCK-OFF} | Lock release time | FS = 0 | 4.375 | 6.25 | 8.125 | s |
| | | FS = 1 | 2.187 | 3.125 | 4.06 | |
| CURRENT LIMIT | | | | | | |
| | Current limit | CS pin to GND resistor = 3.3 kΩ | 1.7 | 2 | 2.3 | A |
| THERMAL SHUTDOWN | | | | | | |
| T _{SDN} | Shutdown temperature threshold | Shutdown temperature | | 160 | | °C |
| | | Hysteresis | | 10 | | |

7.6 Typical Characteristics

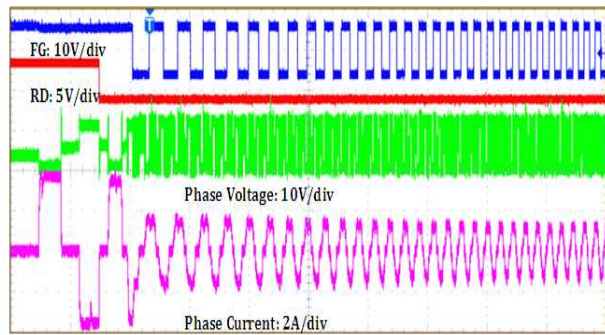


Figure 1. Start Up at 100% Duty

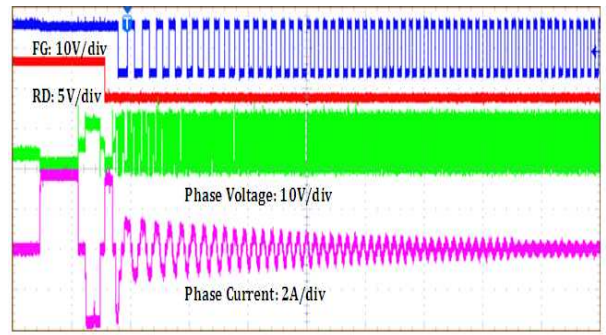


Figure 2. Start Up at 10% Duty

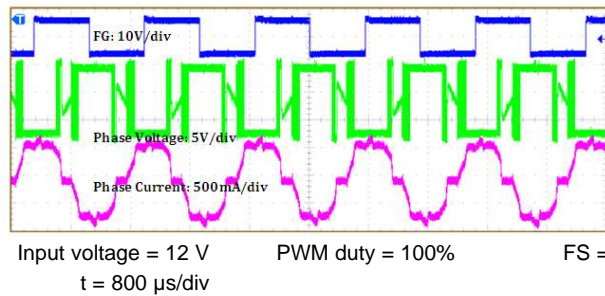


Figure 3. Normal Operation at 100% Duty

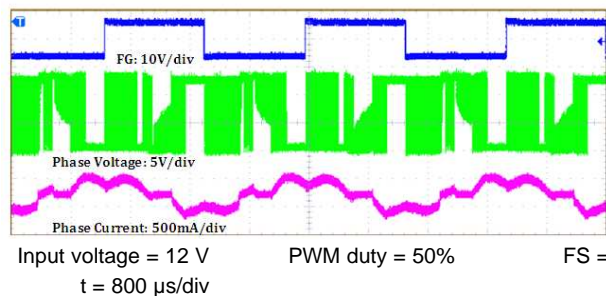


Figure 4. Normal Operation at 50% Duty

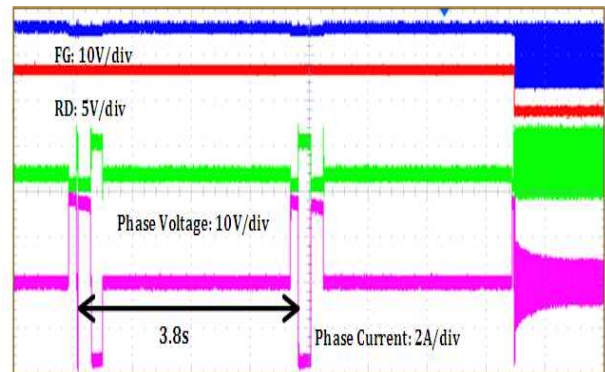


Figure 5. Lock Protection

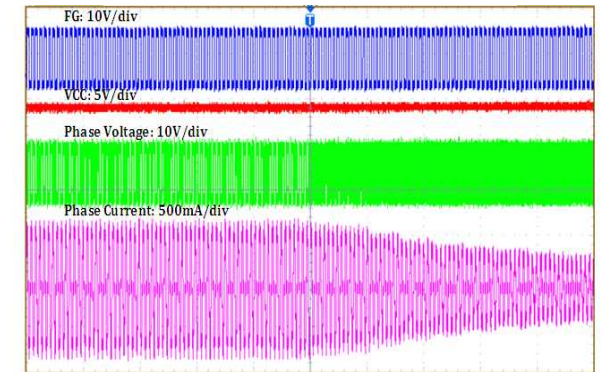
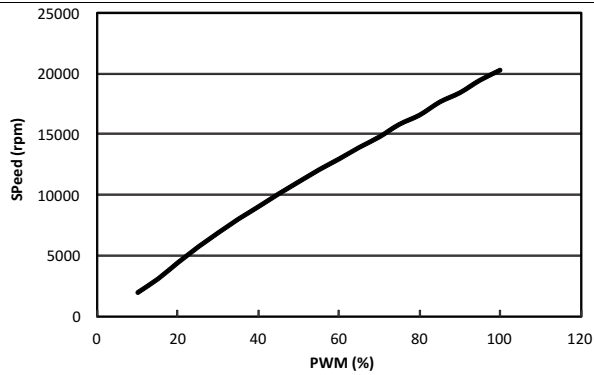
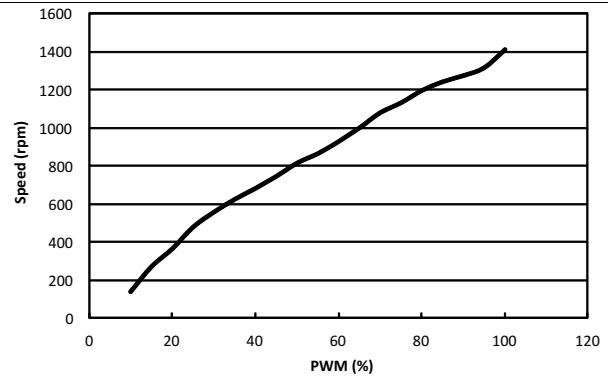
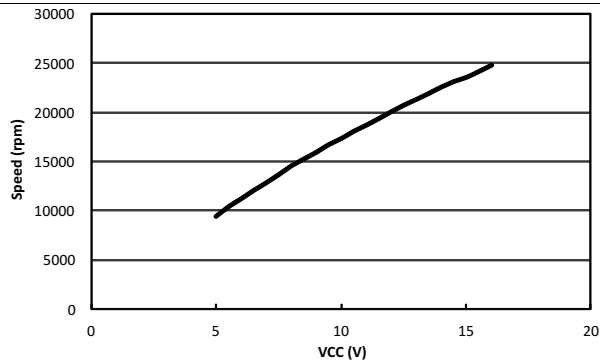
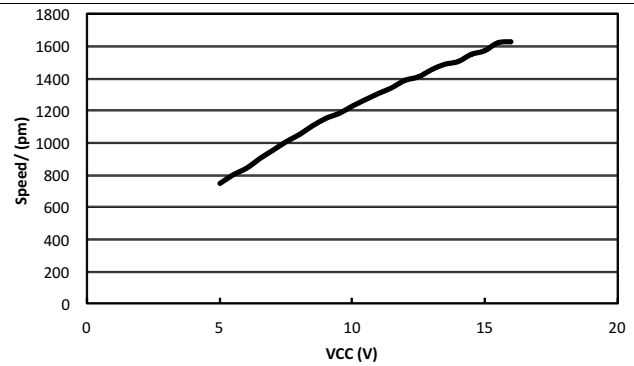
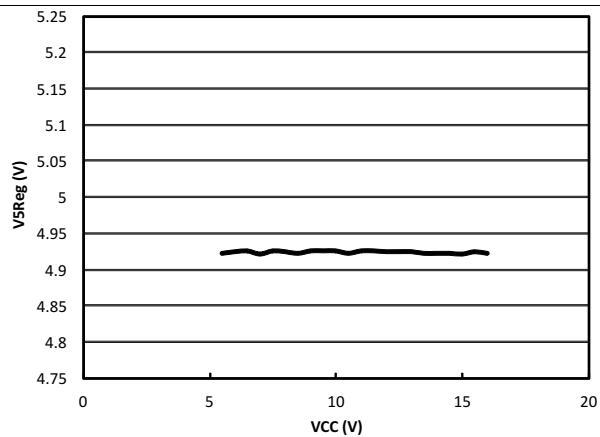
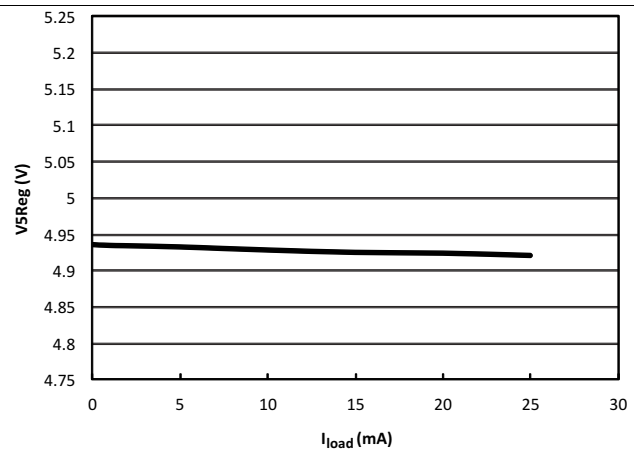


Figure 6. AVS Operation

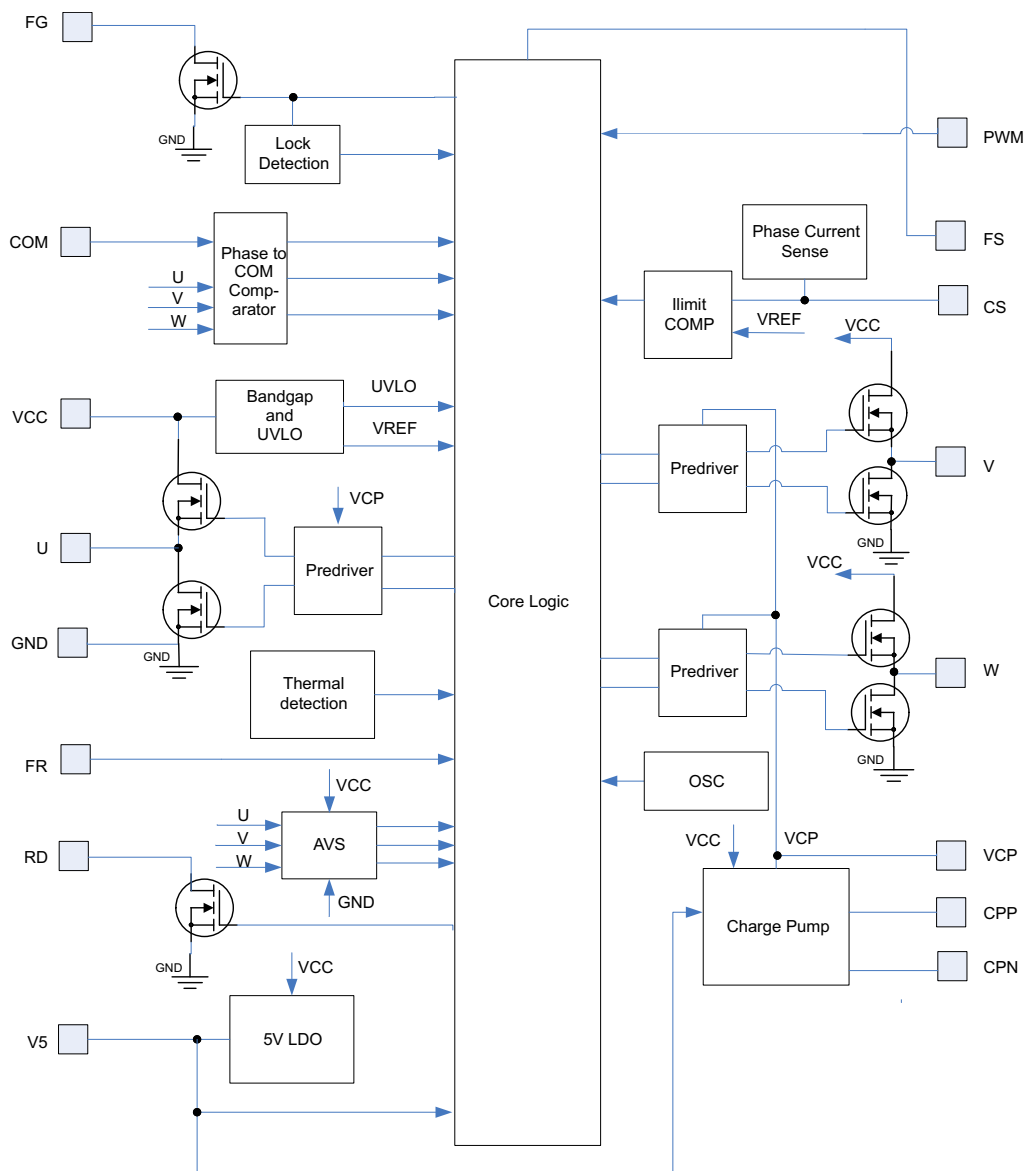
Typical Characteristics (continued)

Figure 7. Fast Motor RPM vs Duty, FS = 1

Figure 8. Slow Motor RPM vs Duty, FS = 0

Figure 9. Fast Motor RPM vs Voltage, FS = 1

Figure 10. Slow Motor RPM vs Voltage, FS = 0

Figure 11. 5-V LDO Line Regulation

Figure 12. 5-V LDO Load Regulation

8 Detailed Description

8.1 Overview

DRV11873 is a three-phase, sensorless motor driver with integrated power MOSFETs with drive current capability up to 1.5-A continuous and 2-A peak. It is specifically designed for fan motor drive applications with low noise and low external component count. DRV11873 has built-in overcurrent protection with no external current sense resistor needed. The synchronous rectification mode of operation achieves increased efficiency for motor driver applications. A 5-V LDO is available to provide up to 20 mA to an external load. DRV11873 outputs FG and RD to indicate motor status with open-drain output. A 150° sensorless BEMF control scheme was implemented for a three-phase motor. DRV11873 can fit a wide range of fan motors with the FS pin selection function. Motor speed can be controlled by adjusting V_{CC} or providing a PWM input. Voltage surge protection scheme prevents the input V_{CC} capacitor from overcharge during motor braking mode. DRV11873 has multiple built-in protection blocks including UVLO, overcurrent protection, lock protection, and thermal shutdown protection.

8.2 Functional Block Diagram



8.3 Feature Description

8.3.1 Speed Control

DRV11873 can control motor speed through either the PWM_{IN} or V_{CC} pin. Motor speed increases with higher PWM_{IN} duty cycle or V_{CC} input voltage. The curve of motor speed (RPM) vs PWM_{IN} duty cycle or V_{CC} input voltage is close to linear in most cases. However, motor characteristics affect the linearity of this speed curve. DRV11873 can operate at low V_{CC} input voltage ≥ 4.1 V. The PWM_{IN} pin is pulled up to V5 internally and the frequency range can vary from 7 to 100 kHz. The motor driver MOSFETs operate at a constant switching frequency of 125 kHz when the FS pin is pulled high and 62.5 kHz when the FS pin is pulled low. With this high switching frequency, DRV11873 can eliminate audible noise and reduce the ripple of V_{CC} input voltage and current.

8.3.2 Frequency Generator

The FG output is a 50% duty square wave output in the normal operation condition. Its frequency represents the motor speed and phase information. The FG pin is an open-drain output. An external pullup resistor is needed to connect any external system. During the start up, the FG output remains at high impedance until the motor speed reaches a certain level and BEMF is detected. If FG is not used, this pin can be left floating. The FG pin can be tied to either V5 or V_{CC} through a pullup resistor. Normally, the pullup resistor value can be 100 kΩ or higher. During lock protection, the FG output remains high until the lockout protection is dismissed and restart is completed. A current limit function is built in for the FG pin which prevents the open-drain MOSFET from damage if V_{CC} or V5 is accidentally connected to the FG pin. To calculate RPM based on FG frequency, refer to [Equation 1](#).

$$\text{RPM} = \frac{(\text{FG} \times 60)}{\text{pole pairs}}$$

where

- FG is in hertz (Hz)

(1)

8.3.3 FS Setting

DRV11873 can fit a wide range of fan motors by setting the FS pin. For high speed fan motors with low motor winding resistance and low inductance, the FS pin should be pulled high. For low speed fan motors with high motor winding resistance and high inductance, the FS pin should be pulled low. Through FS pin selection, DRV11873 can be used for wide applications from low-speed refrigerator cooling fans to high-speed server cooling fans. FS status can only be set during device power up.

8.3.4 Lock Protection and RD Output

If the motor is blocked or stopped by an external force, the lock protection will be triggered after detection time. During lock detection time, the circuit monitors the FG signal. If the FG output does not change state during the lock detection time, the lock protection will stop driving the motor. After lock release time, DRV11873 resumes driving the motor. If the lock condition is still present, DRV11873 proceeds with the next lock protection cycle until the lock condition is removed. With this lock protection, the motor and device do not get overheated or damaged. A different FS setting determines a different lock detection and lock release time. See the [Electrical Characteristics](#) for the different lock detection and release times.

The RD pin is an open-drain output which can be tied to either V5 or V_{CC} through a pullup resistor. Normally, the pullup resistor value can be 100 kΩ or higher. During the lock protection condition, the RD output remains high until the lock protection is dismissed and restart is completed. A current limit function is built in for the RD pin which prevents the open-drain MOSFET from damage if V_{CC} or V5 is accidentally connected to the RD pin.

8.3.5 Reverse Spin Control FR

DRV11873 has an FR pin to set the motor for forward or reverse spin. During DRV11873 power up, FR status is set. During normal operation, the spin direction of the motor does not change if the FR status is changed. The FR status can be reset if the PWM_{IN} is pulled low; if FS is high, PWM must be pulled low for 300 μs, and if FS is low, PWM must be low for 600 μs. After being pulled down for the appropriate time, the FR status resets upon the PWM rising edge.

Feature Description (continued)

8.3.6 5-V LDO

DRV11873 has a built-in 5-V LDO which can output a 20-mA load current. It can provide 5-V bias voltage for external use. TI recommends a 2.2-μF ceramic capacitor to connect closely on the PCB layout between the V5 pin and ground.

8.3.7 Overcurrent Protection

DRV11873 can adjust overcurrent through the external resistor connected to the CS pin and ground. Without using an external current sense resistor, DRV11873 senses the current through the power MOSFET. Therefore, no power loss occurs during the current sensing. This current sense architecture improves the system efficiency. Shorting the CS pin to ground disables overcurrent protection. During overcurrent protection, DRV11873 only limits the current to the motor and it does not shut down the operation. The overcurrent threshold can be set by the value of the external resistor through [Equation 2](#).

$$I \text{ (A)} = \frac{6600}{R_{CS} \text{ (}\Omega\text{)}} \quad (2)$$

During motor start up, the overcurrent level is increased to 1.5 times the value set by R_{CS} . If the overcurrent protection is triggered during the start up sequence, the motor will fail to start.

8.3.8 UVLO

DRV11873 has a built-in UVLO function block. The hysteresis of the UVLO threshold is 200 mV. The device is locked out when V_{CC} reaches 4.1 V and woken up at 4.3 V.

8.3.9 Thermal Shutdown

DRV11873 has a built-in thermal shutdown function, which shuts down the device when the junction temperature is over 160°C and resumes operating when the junction temperature drops back to 150°C.

8.3.10 Anti-Voltage Surge (AVS)

The DRV11873 has a protection feature to prevent any energy from returning to the power supply when the motor is braked. This feature, AVS, protects the device as well as any other device from allowing V_{CC} from increasing. AVS works when the motor is braked to a lower speed and when the motor is stopped.

8.4 Device Functional Modes

8.4.1 Startup

At startup, commutation logic starts to drive the motor with one phase high, one phase low, and the third shut off. If a zero-cross is detected on the shut off phase, commutation logic advances to the next step; the same phase high, the shut off phase goes low, and the low phase is shut off. Initially, the BEMF is not strong enough to detect the zero crossings, at this very initial stage the commutation switches automatically until the BEMF is large enough to read. In startup mode, 100% duty cycle is applied regardless of PWM input. After the commutation logic receives 4 continuous successful zero-crossings, it switches to normal operation.

In certain cases, the motor may have initial speed when the device attempts to startup the motor again. When this occurs, the commutation logic jumps over the startup process and goes to normal operation directly.

8.4.2 Closed Loop Control

After the motor is started successfully, the start up control switches to steady state operation. In steady state control, the motor is commutated 150°. This is an advanced trapezoidal method that allows the device to drive the phases gradually to the maximum current and gradually to 0 at commutation.

Device Functional Modes (continued)

8.4.3 AVS Protection

When the device is commanded to decelerate or stop the motor, in order to protect the IC and the system, the DRV11873 has AVS protection. This function keeps the voltage supply, V_{CC} , from surging above the nominal value. To do this, the device monitors the current flow in the MOSFETs and is able to sense when the surging starts to occur. The AVS function controls the current, not allowing it to charge back to V_{CC} so that there is no voltage surging.

9 Application and Implementation

NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

9.1 Application Information

DRV11873 only requires five external components. The device needs a 10- μ F or higher ceramic capacitor connected to V_{CC} and ground for decoupling. During layout, the strategy of ground copper pour is very important to enhance the thermal performance. For two or more layers, use eight thermal vias. Refer to [Layout Example](#) for an example of the PCB layout. For high current motors, place three Schottky diodes between phases U, V, W, and ground. Each diode anode terminal must be connected to ground and the cathode terminal must be connected to either U, V, or W. If there is no COM pin on the motor, one can be simulated. Use three resistors connected in a wye formation, one connected to U, one to V, and one to W. Connect the resistor ends opposite of the phases together. This center point is COM. To find the proper resistor value, start with a value of 10 k Ω and continue to decrease by 1 k Ω until the motor runs properly.

9.2 Typical Application

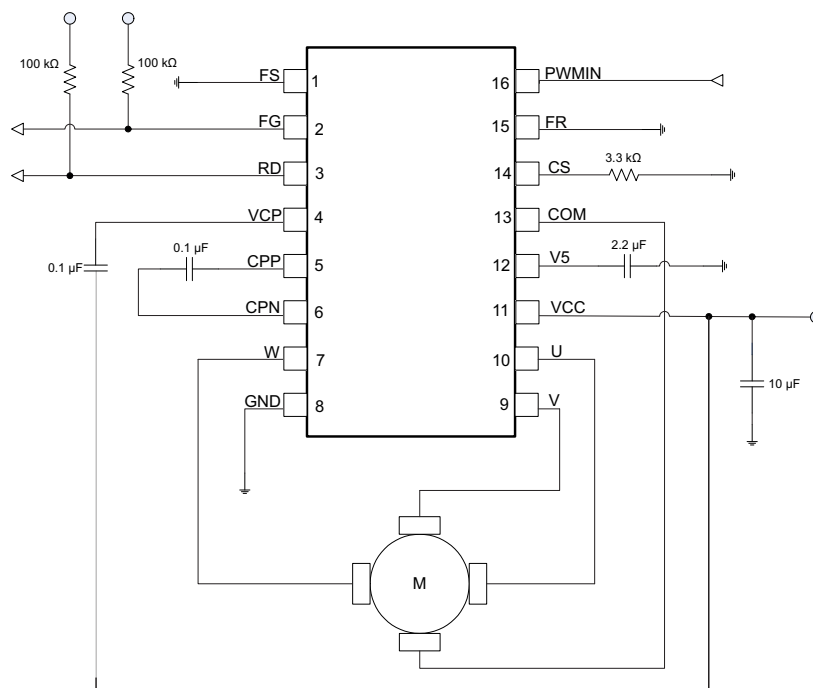


Figure 13. Typical Application Schematic

9.2.1 Design Requirements


Table 1. Design Parameters

| | | MIN | TYP | MAX | UNIT |
|----------------------|---|-----|-----|-----|---------|
| Motor voltage | | 5 | | 16 | V |
| VCC capacitor | Place as close to the pin as possible | | 10 | | μ F |
| Operating current | Running with normal load at rated speed | | | 1.5 | A |
| Absolute max current | During startup and locked motor condition | | | 2 | A |

9.2.2 Detailed Design Procedure

1. Refer to the [Design Requirements](#) and ensure the system meets the recommended application range.
 - Ensure the V_{CC} level is in between 5 and 16 V
 - Verify the motor needs no more than 1.5 A during runtime
2. Follow the application and [Power Supply Recommendations](#) when constructing the schematic.
 - If the motor is high current/ high speed, use three Schottky diodes between the phases and ground.
 - Make sure there is adequate capacitance on VCC, V5, VCP, CPP, and CPN.
 - Size the resistor on CS according to the details given in feature description.
 - Use a pull-up on FG and RD.
 - If the motor doesn't have a common pin, create one using the method listed in [Application Information](#).
3. Build the hardware according to the [Layout Guidelines](#).
 - Place the supply capacitors as close to the pins as possible.
 - Route the U, V, W, and VCC traces to handle the allowed current.
 - Ensure GND connections are made with the pin and thermal PAD.
 - Use vias on the thermal pad to dissipate heat away from the IC.
4. Test the system with the application's motor to verify proper operation.

9.2.3 Application Curves

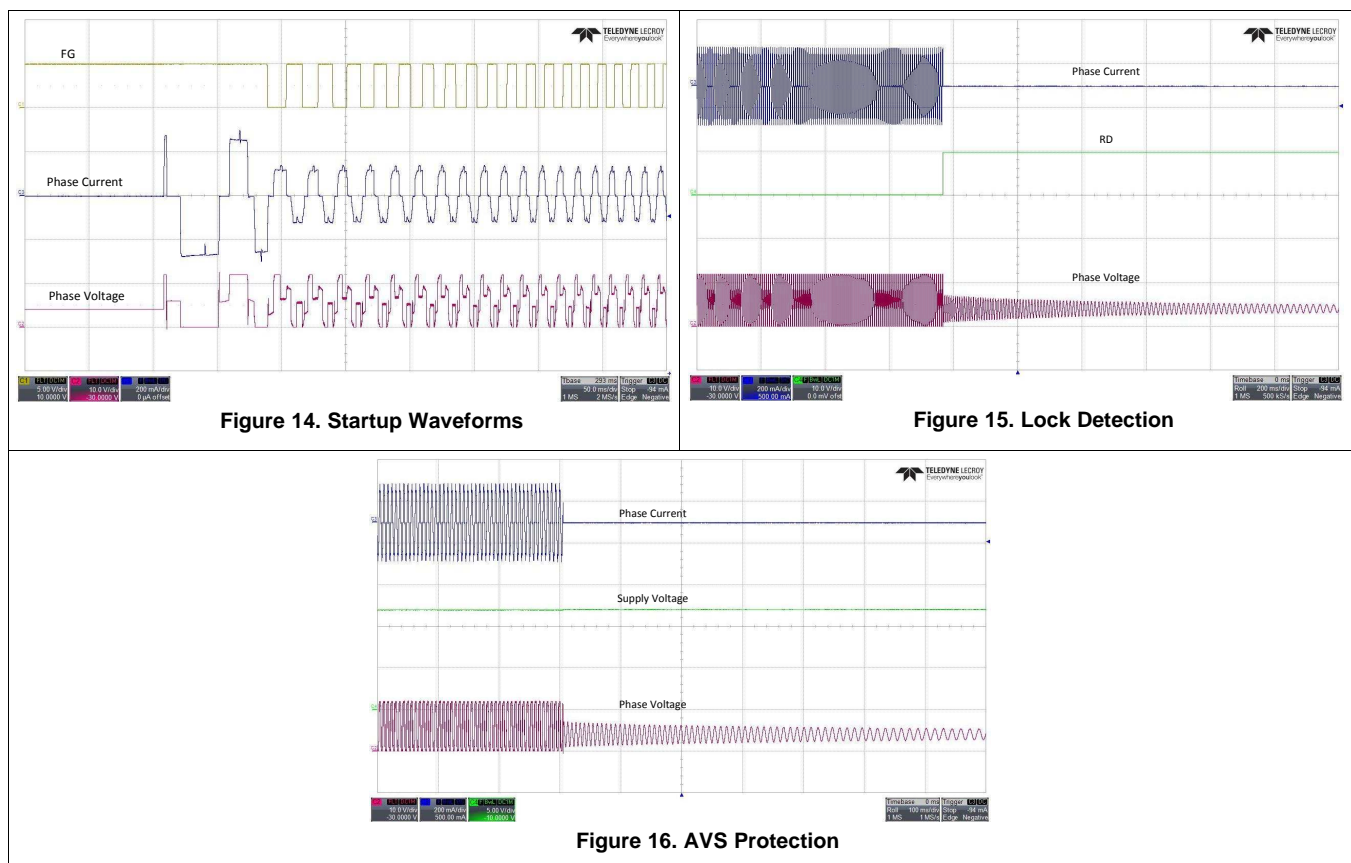

10 Power Supply Recommendations

The DRV11873 is designed to operate from an input voltage supply, V_{CC} , range between 5 and 16 V. The user must place a 10- μ F ceramic capacitor rated for V_{CC} as close as possible to the V_{CC} and GND pin. If the power supply ripple is more than 200 mV, in addition to the local decoupling capacitors, a bulk capacitance is required and must be sized according to the application requirements. If the bulk capacitance is implemented in the application, the user can reduce the value of the local ceramic capacitor to 1 μ F.

11 Layout

11.1 Layout Guidelines

- Place V_{CC} , GND, U, V, and W pins with thick traces because high current passes through these traces.
- Place the 10- μ F capacitor between V_{CC} and GND, and as close to the V_{CC} and GND pins as possible.
- Place the capacitor between CPP and CPN, and as close to the CPP and CPN pins as possible.
- Place the capacitor between V5 and GND as close to the V5 pin as possible.
- Connect the GND under the thermal pad.
- Keep the thermal pad connection as large as possible, both on the bottom side and top side. It should be one piece of copper without any gaps.

11.2 Layout Example

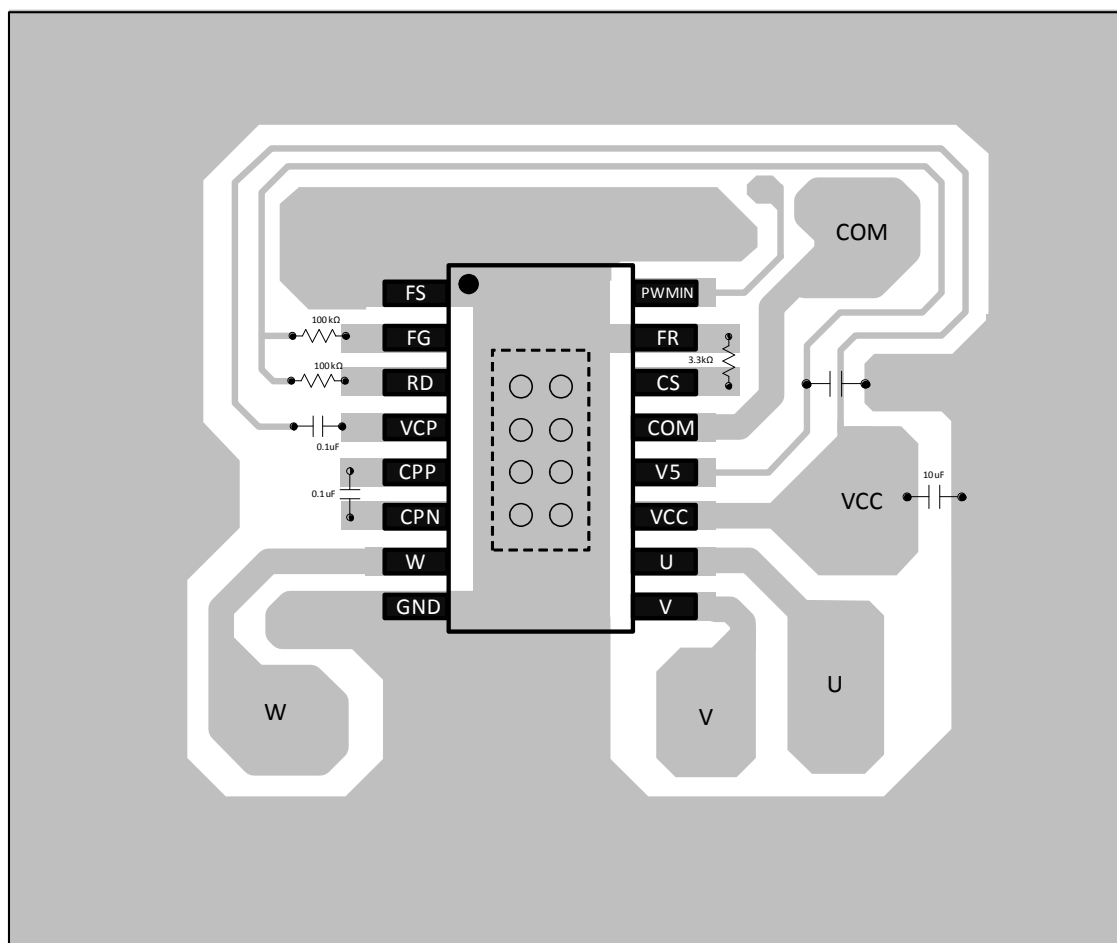


Figure 17. Layout Example Schematic

12 器件和文档支持

12.1 商标

All trademarks are the property of their respective owners.

12.2 静电放电警告



这些装置包含有限的内置 ESD 保护。存储或装卸时，应将导线一起截短或将装置放置于导电泡棉中，以防止 MOS 门极遭受静电损伤。

12.3 术语表

[SLYZ022](#) — TI 术语表。

这份术语表列出并解释术语、首字母缩略词和定义。

13 机械、封装和可订购信息

以下页中包括机械、封装和可订购信息。这些信息是针对指定器件可提供的最新数据。这些数据会在无通知且不对本文档进行修订的情况下发生改变。要获得这份数据表的浏览器版本，请查阅左侧导航栏。

PACKAGING INFORMATION

| Orderable part number | Status (1) | Material type (2) | Package Pins | Package qty Carrier | RoHS (3) | Lead finish/ Ball material (4) | MSL rating/ Peak reflow (5) | Op temp (°C) | Part marking (6) |
|------------------------------|---------------|----------------------|-------------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| DRV11873PWPR | Active | Production | HTSSOP (PWP) 16 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | 11873 |

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION



*All dimensions are nominal


| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| DRV11873PWPR | HTSSOP | PWP | 16 | 2000 | 330.0 | 12.4 | 6.9 | 5.6 | 1.6 | 8.0 | 12.0 | Q1 |

TAPE AND REEL BOX DIMENSIONS





*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|--------------|--------------|-----------------|------|------|-------------|------------|-------------|
| DRV11873PWPR | HTSSOP | PWP | 16 | 2000 | 350.0 | 350.0 | 43.0 |

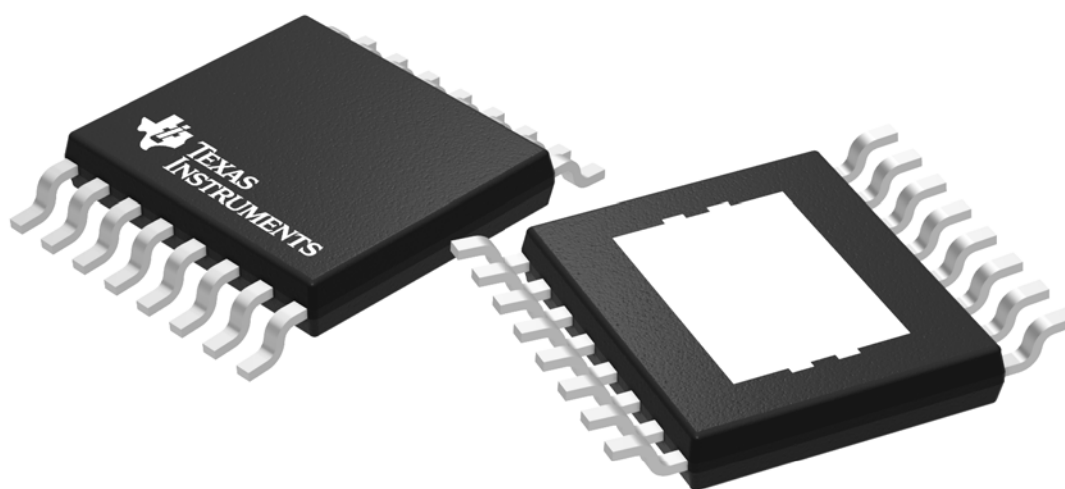

Images above are just a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

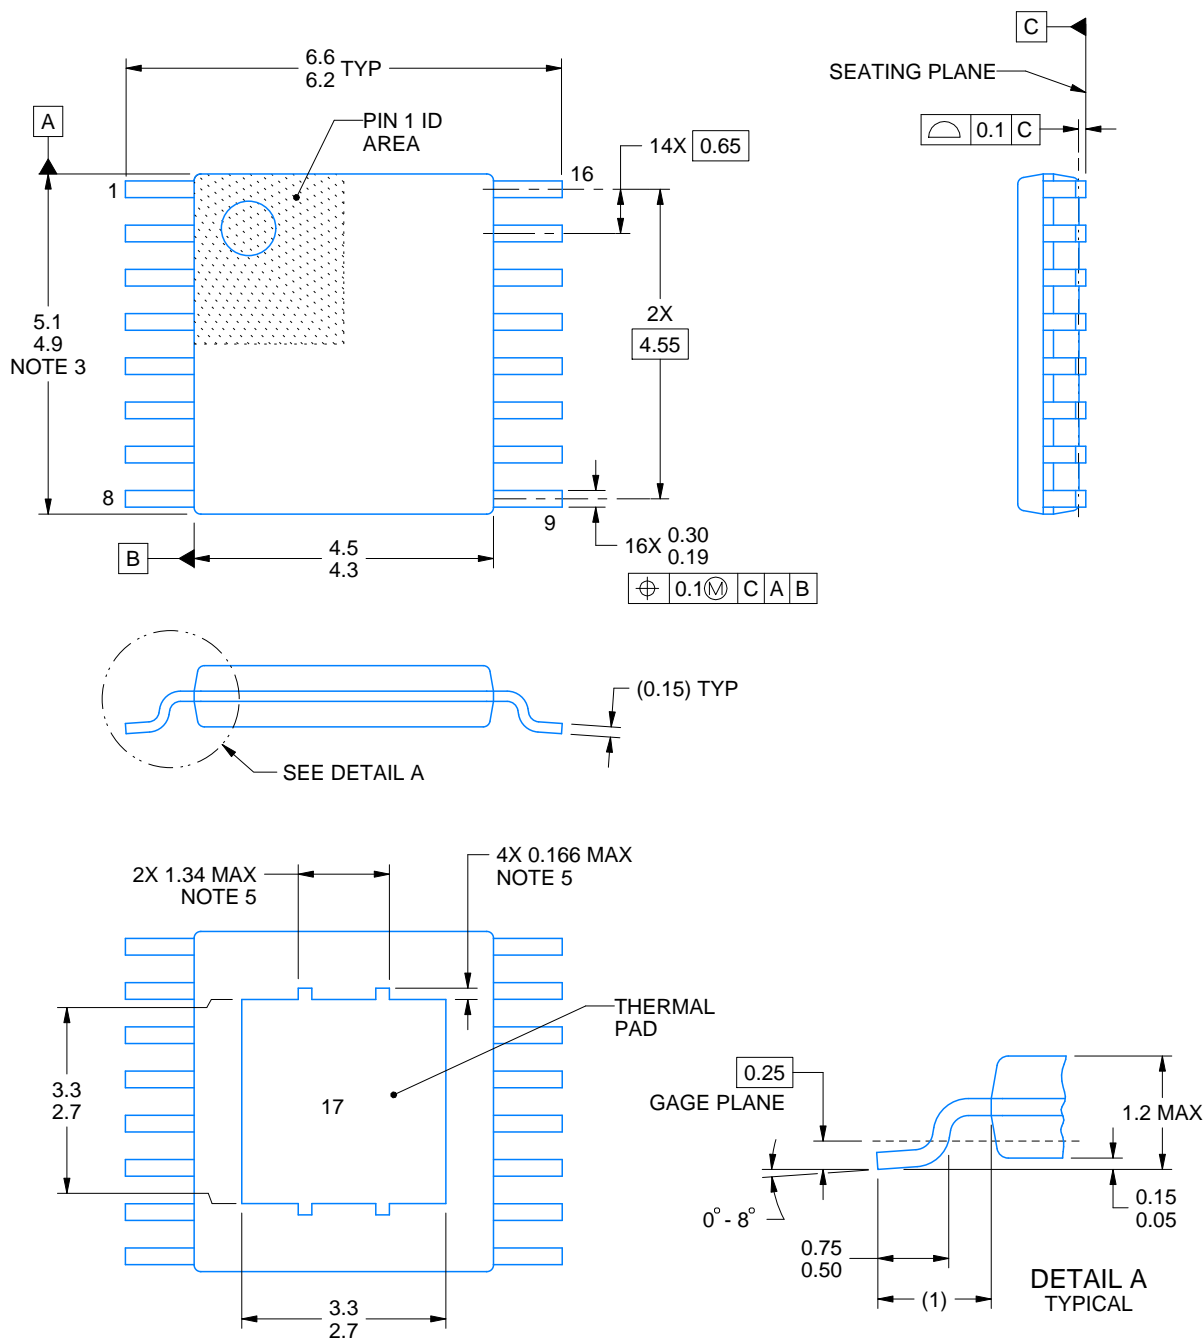

4214868/A 02/2017

NOTES:

PowerPAD is a trademark of Texas Instruments.


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. Reference JEDEC registration MO-153.
5. Features may not be present.

EXAMPLE BOARD LAYOUT


PWP0016A

PowerPAD™ HTSSOP - 1.2 mm max height


PLASTIC SMALL OUTLINE

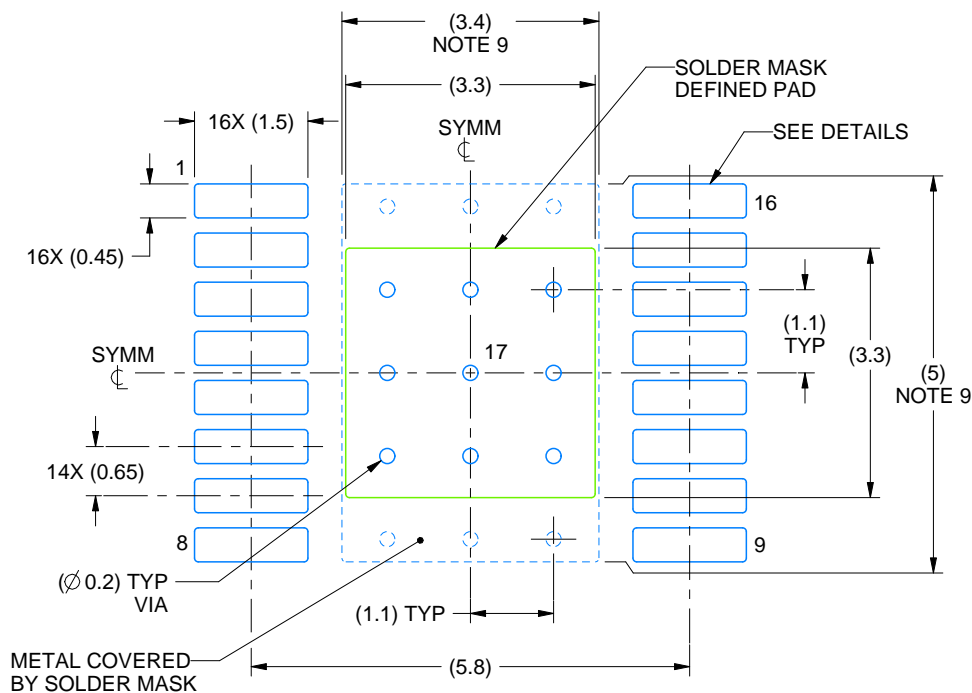

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:10X

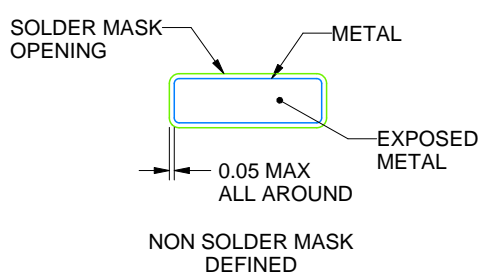

NON SOLDER MASK
DEFINED

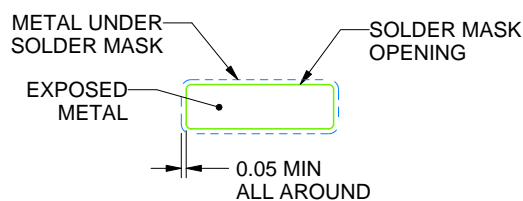

SOLDER MASK
DEFINED

SOLDER MASK DETAILS
PADS 1-16

4214868/A 02/2017

NOTES: (continued)


6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
8. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature numbers SLMA002 (www.ti.com/lit/slma002) and SLMA004 (www.ti.com/lit/slma004).
9. Size of metal pad may vary due to creepage requirement.

EXAMPLE STENCIL DESIGN

PWP0016A

PowerPAD™ HTSSOP - 1.2 mm max height

PLASTIC SMALL OUTLINE

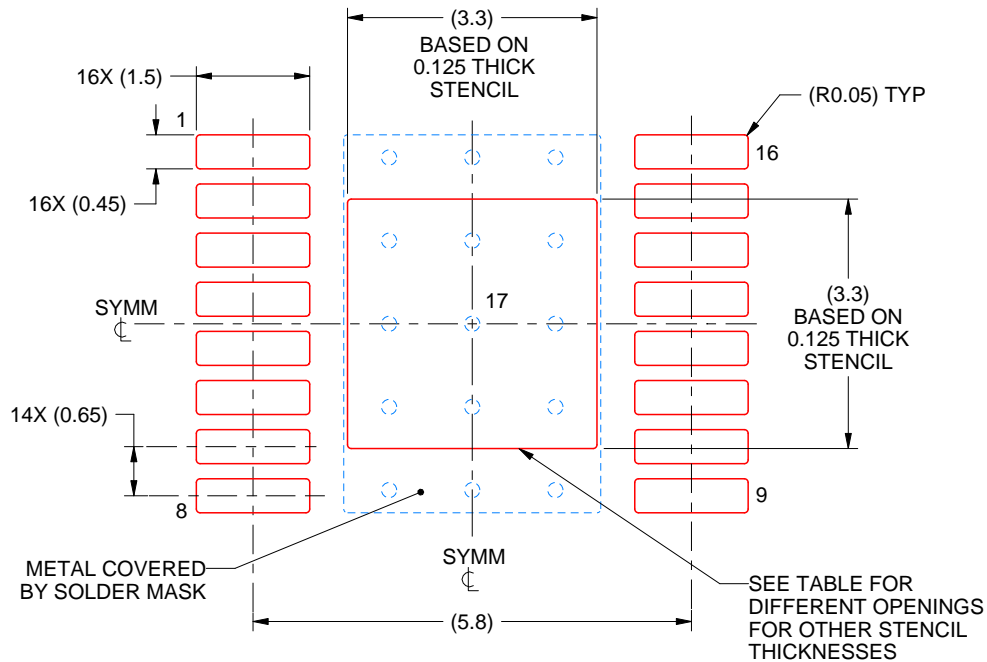

SOLDER PASTE EXAMPLE
EXPOSED PAD
100% PRINTED SOLDER COVERAGE BY AREA
SCALE:10X

| STENCIL THICKNESS | SOLDER STENCIL OPENING |
|-------------------|------------------------|
| 0.1 | 3.69 X 3.69 |
| 0.125 | 3.3 X 3.3 (SHOWN) |
| 0.15 | 3.01 X 3.01 |
| 0.175 | 2.79 X 2.79 |

4214868/A 02/2017

NOTES: (continued)

10. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
11. Board assembly site may have different recommendations for stencil design.

重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、某特定用途方面的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他功能安全、信息安全、监管或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。您应全额赔偿因在这些资源的使用中对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，TI 对此概不负责。

TI 提供的产品受 [TI 的销售条款](#) 或 [ti.com](#) 上其他适用条款/TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

邮寄地址：Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
版权所有 © 2025，德州仪器 (TI) 公司