

# Single and Dual, Rail-to-Rail I/O, CMOS Amplifier

## FAN4174, FAN4274

### Description

The FAN4174 (single) and FAN4274 (dual) are voltage feedback amplifiers with CMOS inputs that consume only 200  $\mu$ A of supply current per amplifier, while providing  $\pm 33$  mA of output short-circuit current. These amplifiers are designed to operate 5 V supplies. The common mode voltage range extends beyond the negative and positive rails.

The FAN4174 and FAN4274 are designed on a CMOS process and provide 3.7 MHz of bandwidth and 3 V /  $\mu$ s of slew rate at a supply voltage of 5 V.

These amplifiers operate and are reliable over a wide temperature range of  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ .


The combination of extended temperature operation, low power, rail-to-rail performance, low-voltage operation, and a tiny package optimize this amplifier family for use in many industrial, general-purpose, and battery-powered applications.

### Features


- 200  $\mu$ A Supply Current per Amplifier
- 3.7 MHz Bandwidth
- Output Swing to Within 10 mV of Either Rail
- Input Voltage Range Exceeds the Rails
- 3 V/ $\mu$ s Slew Rate
- 25 nV/ $\sqrt{\text{Hz}}$  Input Voltage Noise
- Replaces KM4170 and KM4270
- FAN4174 Competes with OPA340 and TLV2461; Available in a SOT23-5 Package
- FAN4274 Competes with OPA2340 and TLV2462; Available in MSOP-8 Package
- Fully Specified at +5 V Supplies
- These are Pb-Free Devices

### Applications

- Motor Control
- Portable / Battery-powered Applications
- PCMCIA, USB
- Mobile Communications, Cellular Phones, Pagers
- Notebooks and PDAs
- Sensor Interface
- A/D Buffer
- Active Filters
- Signal Conditioning
- Portable Test Instruments




SOT-23, 5 Lead  
CASE 527AH-01




Micro8  
CASE 846A-02

### MARKING DIAGRAM



- |     |                             |
|-----|-----------------------------|
| 0A4 | = Specific Device Code      |
| &Y  | = Binary Year Coding        |
| &O  | = Plant Code Identifier     |
| &C  | = Single Digit Die Run Code |
| &V  | = Eight-Week Data Coding    |



- |      |                                      |
|------|--------------------------------------|
| 4274 | = Specific Device Code               |
| &Z   | = Assembly Plant Code                |
| &2   | = 2-Digit Date Code                  |
| &K   | = 2-Digits Lot Run Traceability Code |

### ORDERING INFORMATION

See detailed ordering and shipping information on page 12 of this data sheet.

## FAN4174, FAN4274

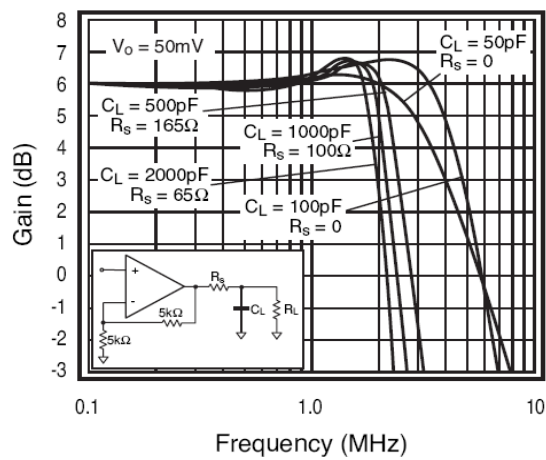


Figure 1. Frequency vs. Gain

## TYPICAL APPLICATION

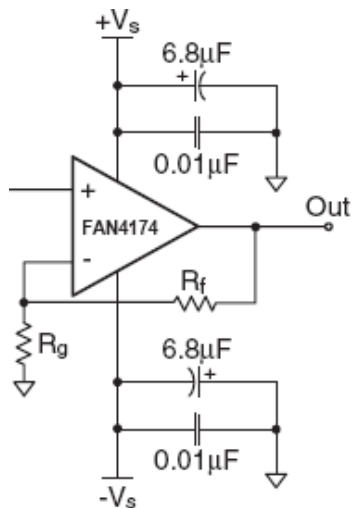


Figure 2. Typical Application Circuit

## PIN CONFIGURATIONS




Figure 3. FAN4174 (SOT23)




Figure 4. FAN4274 (MSOP)

## FAN4174, FAN4274

### FAN4174 PIN ASSIGNMENTS

| Pin No. | Name   | Description     |
|---------|--------|-----------------|
| 1       | OUT    | Output          |
| 2       | $-V_S$ | Negative Supply |
| 3       | +IN    | Positive Supply |
| 4       | -IN    | Negative Input  |
| 5       | $+V_S$ | Positive Supply |

### FAN4274 PIN ASSIGNMENTS

| Pin No. | Name   | Description               |
|---------|--------|---------------------------|
| 1       | OUT1   | Output, Channel 1         |
| 2       | -IN1   | Negative Input, Channel 1 |
| 3       | +IN1   | Positive Input, Channel 1 |
| 4       | $-V_S$ | Negative Supply           |
| 5       | +IN2   | Positive Input, Channel 2 |
| 6       | -IN2   | Negative Input, Channel 2 |
| 7       | OUT2   | Output, Channel 2         |
| 8       | $+V_S$ | Positive Supply           |

### ABSOLUTE MAXIMUM RATINGS

| Symbol        | Parameter                   |              | Min          | Max          | Unit |
|---------------|-----------------------------|--------------|--------------|--------------|------|
| $V_{CC}$      | Supply Voltage              |              | 0            | 6            | V    |
| $V_{IN}$      | Input Voltage Range         |              | $-V_S - 0.5$ | $+V_S + 0.5$ | V    |
| $T_J$         | Junction Temperature        |              | -            | +150         | °C   |
| $T_{STG}$     | Storage Temperature         |              | -65          | +150         | °C   |
| $T_L$         | Lead Soldering, 10 Seconds  |              | -            | +300         | °C   |
| $\Theta_{JA}$ | Thermal Resistance (Note 1) | 5-Lead SOT23 | -            | 256          | °C/W |
|               |                             | 8-Lead MSOP  | -            | 206          |      |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Package thermal resistance JEDEC standard, multi-layer test boards, still air.

### RECOMMENDED OPERATING CONDITIONS

| Symbol | Parameter                   | Min  | Max  | Unit |
|--------|-----------------------------|------|------|------|
| $+V_S$ | Supply Voltage              | 2.30 | 5.25 | V    |
| $T_A$  | Operating Temperature Range | -40  | +125 | °C   |

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

# FAN4174, FAN4274

**ELECTRICAL SPECIFICATIONS AT +2.7 V** ( $V_S = +2.7\text{ V}$ ,  $G = 2$ ,  $R_L = 10\text{ k}\Omega$  to  $V_S / 2$ ,  $R_F = 5\text{ k}\Omega$ ; unless otherwise noted)

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|--------|-----------|------------|-----|-----|-----|------|
|--------|-----------|------------|-----|-----|-----|------|

## FREQUENCY DOMAIN RESPONSE

|                  |                        |          |   |     |   |     |
|------------------|------------------------|----------|---|-----|---|-----|
| UGBW             | -3 dB Bandwidth        | $G = +1$ | - | 4.0 | - | MHz |
| BW <sub>SS</sub> |                        |          | - | 2.5 | - | MHz |
| GBWP             | Gain Bandwidth Product |          | - | 4   | - | MHz |

## TIME DOMAIN RESPONSE

|            |                    |                                 |   |     |   |            |
|------------|--------------------|---------------------------------|---|-----|---|------------|
| $t_R, t_F$ | Rise and Fall Time | $V_O = 1.0\text{ V Step}$       | - | 300 | - | ns         |
| OS         | Overshoot          | $V_O = 1.0\text{ V Step}$       | - | 5   | - | %          |
| SR         | Slew Rate          | $V_O = 3\text{ V Step}, G = -1$ | - | 3   | - | V/ $\mu$ s |

## DISTORTION AND NOISE RESPONSE

|                   |                           |                                        |   |      |   |                        |
|-------------------|---------------------------|----------------------------------------|---|------|---|------------------------|
| HD2               | 2nd Harmonic Distortion   | $V_O = 1\text{ V}_{PP}, 10\text{ kHz}$ | - | -66  | - | dBc                    |
| HD3               | 3rd Harmonic Distortion   | $V_O = 1\text{ V}_{PP}, 10\text{ kHz}$ | - | -67  | - | dBc                    |
| THD               | Total Harmonic Distortion | $V_O = 1\text{ V}_{PP}, 10\text{ kHz}$ | - | 0.1  | - | %                      |
| $e_n$             | Input Voltage Noise       |                                        | - | 26   | - | nV/ $\sqrt{\text{Hz}}$ |
| X <sub>TALK</sub> | Crosstalk (FAN4274)       | 100 kHz                                | - | -100 | - | dB                     |

## DC PERFORMANCE

|            |                                       |    |    |     |     |                              |
|------------|---------------------------------------|----|----|-----|-----|------------------------------|
| $V_{IO}$   | Input Offset Voltage (Note 2)         |    | -6 | 0   | +6  | mV                           |
| d $V_{IO}$ | Average Drift                         |    | -  | 2.1 | -   | $\mu\text{V}/^\circ\text{C}$ |
| $I_{bn}$   | Input Bias Current                    |    | -  | 5   | -   | pA                           |
| PSRR       | Power Supply Rejection Ratio (Note 2) | DC | 50 | 73  | -   | dB                           |
| $A_{OL}$   | Open-loop Gain                        | DC | -  | 98  | -   | dB                           |
| $I_S$      | Supply Current per Amplifier (Note 2) |    | -  | 200 | 300 | $\mu\text{A}$                |

## INPUT CHARACTERISTICS

|                 |                                      |         |                                    |    |             |   |    |
|-----------------|--------------------------------------|---------|------------------------------------|----|-------------|---|----|
| R <sub>IN</sub> | Input Resistance                     |         |                                    | –  | 10          | – | GΩ |
| C <sub>IN</sub> | Input Capacitance                    |         |                                    | –  | 1.4         | – | pF |
| CMIR            | Input Common Mode Voltage Range      |         |                                    | –  | –0.3 to 2.8 | – | V  |
| CMRR            | Common Mode Rejection Ratio (Note 2) | FAN4174 | DC, V <sub>CM</sub> = 0 V to 2.2 V | 50 | 65          | – | dB |
|                 |                                      | FAN4274 | DC, V <sub>CM</sub> = 0 V to 2.2 V | 50 | 65          | – |    |

## OUTPUT CHARACTERISTICS

|          |                               |                                        |      |              |      |    |
|----------|-------------------------------|----------------------------------------|------|--------------|------|----|
| $V_O$    | Output Voltage Swing (Note 2) | $R_L = 10\text{ k}\Omega$ to $V_S / 2$ | 0.03 | 0.01 to 2.69 | 2.65 | V  |
|          |                               | $R_L = 1\text{ k}\Omega$ to $V_S / 2$  | -    | 0.05 to 2.55 | -    |    |
| $I_{SC}$ | Short-Circuit Output Current  |                                        | -    | +34 / -12    | -    | mA |
| $V_S$    | Power Supply Operating Range  |                                        | -    | 2.5 to 5.5   | -    | V  |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

2. 100% tested at 25°C.

# FAN4174, FAN4274

**ELECTRICAL SPECIFICATIONS AT +5 V** ( $V_S = +5\text{ V}$ ,  $G = 2$ ,  $R_L = 10\text{ k}\Omega$  to  $V_S / 2$ ,  $R_F = 5\text{ k}\Omega$ ; unless otherwise noted)

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|--------|-----------|------------|-----|-----|-----|------|
|--------|-----------|------------|-----|-----|-----|------|

## FREQUENCY DOMAIN RESPONSE

|                  |                        |                                      |   |     |   |     |
|------------------|------------------------|--------------------------------------|---|-----|---|-----|
| UGBW             | –3dB Bandwidth         | $G = +1$ , $T_A = 85^\circ\text{C}$  | – | 3.7 | – | MHz |
|                  |                        | $G = +1$ , $T_A = 125^\circ\text{C}$ | – | 3.2 | – |     |
| BW <sub>SS</sub> |                        |                                      | – | 2.3 | – | MHz |
| GBWP             | Gain Bandwidth Product | $T_A = 85^\circ\text{C}$             | – | 3.7 | – | MHz |
|                  |                        | $T_A = 125^\circ\text{C}$            | – | 3.2 | – |     |

## TIME DOMAIN RESPONSE

|            |                    |                                    |   |     |   |                  |
|------------|--------------------|------------------------------------|---|-----|---|------------------|
| $t_R, t_F$ | Rise and Fall Time | $V_O = 1.0\text{ V Step}$          | – | 300 | – | ns               |
| OS         | Overshoot          | $V_O = 1.0\text{ V Step}$          | – | 5   | – | %                |
| SR         | Slew Rate          | $V_O = 3\text{ V Step}$ , $G = -1$ | – | 3   | – | V/ $\mu\text{s}$ |

## DISTORTION AND NOISE RESPONSE

|                   |                           |                                  |   |      |   |                        |
|-------------------|---------------------------|----------------------------------|---|------|---|------------------------|
| HD2               | 2nd Harmonic Distortion   | $V_O = 1\text{ V}_{PP}$ , 10 kHz | – | –80  | – | dBc                    |
| HD3               | 3rd Harmonic Distortion   | $V_O = 1\text{ V}_{PP}$ , 10 kHz | – | –80  | – | dBc                    |
| THD               | Total Harmonic Distortion | $V_O = 1\text{ V}_{PP}$ , 10 kHz | – | 0.02 | – | %                      |
| $e_n$             | Input Voltage Noise       |                                  | – | 25   | – | nV/ $\sqrt{\text{Hz}}$ |
| X <sub>TALK</sub> | Crosstalk (FAN4274)       | 100 kHz                          | – | –100 | – | dB                     |

## DC PERFORMANCE

|            |                                             |    |    |     |     |                              |
|------------|---------------------------------------------|----|----|-----|-----|------------------------------|
| $V_{IO}$   | Input Offset Voltage <sup>(3)</sup>         |    | –8 | 0   | +8  | mV                           |
| d $V_{IO}$ | Average Drift                               |    | –  | 2.9 | –   | $\mu\text{V}/^\circ\text{C}$ |
| $I_{bn}$   | Input Bias Current                          |    | –  | 5   | –   | pA                           |
| PSRR       | Power Supply Rejection Ratio (Note 3)       | DC | 50 | 73  | –   | dB                           |
| $A_{OL}$   | Open-loop Gain                              | DC | –  | 102 | –   | dB                           |
| $I_S$      | Supply Current per Amplifier <sup>(3)</sup> |    | –  | 200 | 300 | $\mu\text{A}$                |

## INPUT CHARACTERISTICS

|          |                                      |                                    |    |             |   |    |
|----------|--------------------------------------|------------------------------------|----|-------------|---|----|
| $R_{IN}$ | Input Resistance                     |                                    | –  | 10          | – | GW |
| $C_{IN}$ | Input Capacitance                    |                                    | –  | 1.2         | – | pF |
| CMIR     | Input Common Mode Voltage Range      |                                    | –  | –0.3 to 5.1 | – | V  |
| CMRR     | Common Mode Rejection Ratio (Note 3) | DC, $V_{CM} = 0\text{ V}$ to $V_S$ | 58 | 73          | – | dB |

## OUTPUT CHARACTERISTICS

|          |                               |                                        |      |              |      |    |
|----------|-------------------------------|----------------------------------------|------|--------------|------|----|
| $V_O$    | Output Voltage Swing (Note 3) | $R_L = 10\text{ k}\Omega$ to $V_S / 2$ | 0.03 | 0.01 to 4.99 | 4.95 | V  |
|          |                               | $R_L = 1\text{ k}\Omega$ to $V_S / 2$  | –    | 0.1 to 4.9   | –    |    |
| $I_{SC}$ | Short-Circuit Output Current  |                                        | –    | $\pm 33$     | –    | mA |
| $V_S$    | Power Supply Operating Range  |                                        | –    | 2.5 to 5.5   | –    | V  |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

3. 100% tested at  $25^\circ\text{C}$ .

## TYPICAL PERFORMANCE CHARACTERISTICS

( $V_S = +2.7\text{ V}$ ,  $G = 2$ ,  $R_L = 10\text{ k}\Omega$  TO  $V_S / 2$ ,  $R_F = 5\text{ k}\Omega$ ; UNLESS OTHERWISE NOTED)

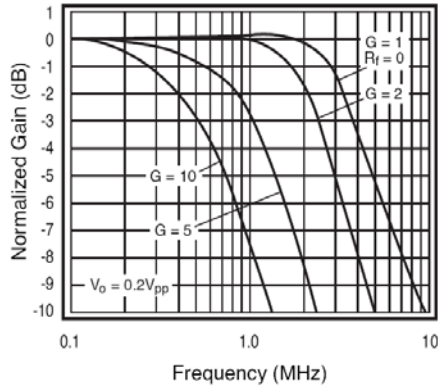


Figure 5. Non-Inverting Frequency Response (+5 V)

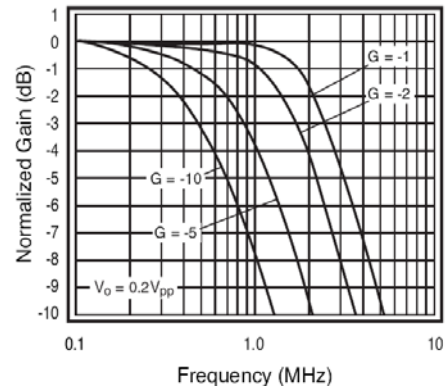


Figure 6. Inverting Frequency Response (+5 V)

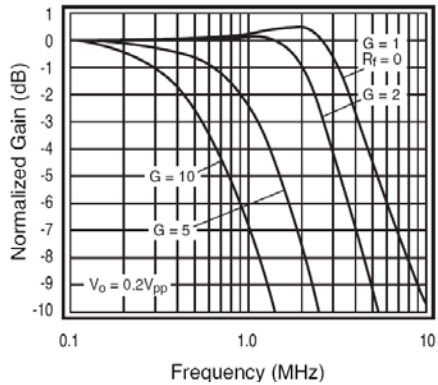


Figure 7. Non-Inverting Frequency Response

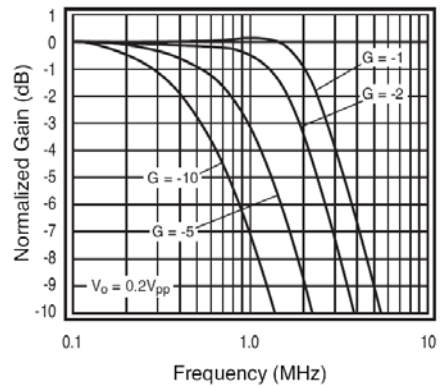


Figure 8. Inverting Frequency Response



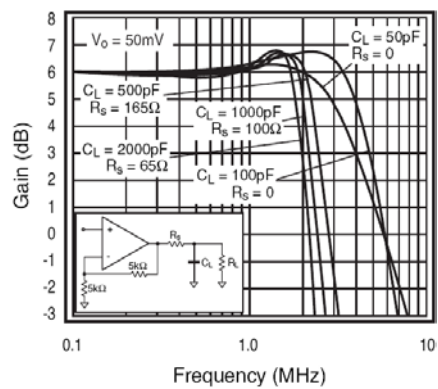
Figure 9. Frequency Response vs.  $C_L$ 


Figure 10. Open-loop Gain and Phase vs. Frequency

**TYPICAL PERFORMANCE CHARACTERISTICS**


( $V_S = +2.7\text{ V}$ ,  $G = 2$ ,  $R_L = 10\text{ k}\Omega$  TO  $V_S / 2$ ,  $R_F = 5\text{ k}\Omega$ ; UNLESS OTHERWISE NOTED) (CONTINUED)

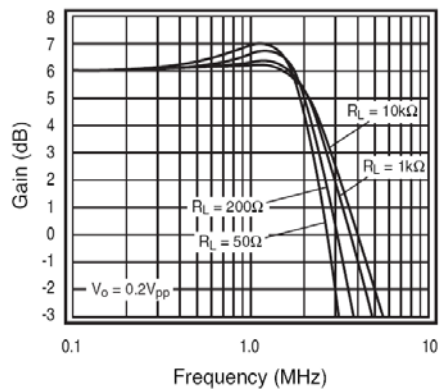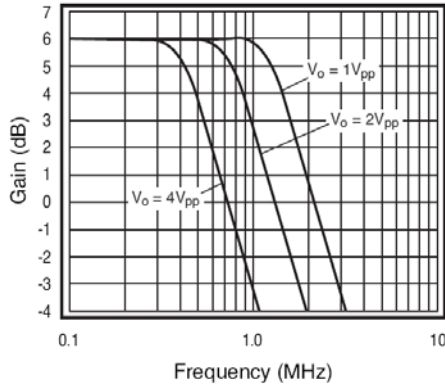


**Figure 11. Large Signal Frequency Response (+5 V)**

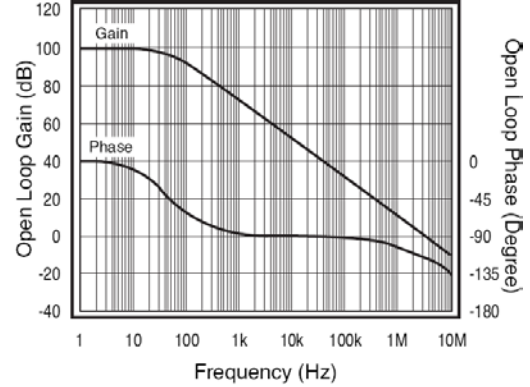


**Figure 12. Open-loop Gain and Phase vs. Frequency**

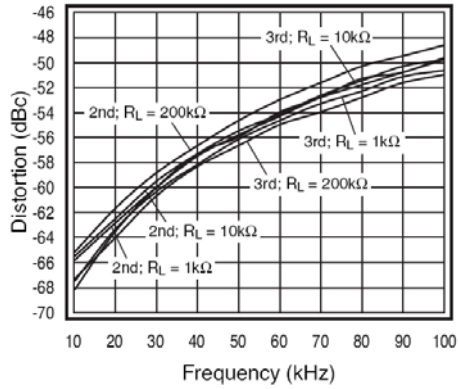


**Figure 13. 2nd and 3rd Harmonic Distortion**

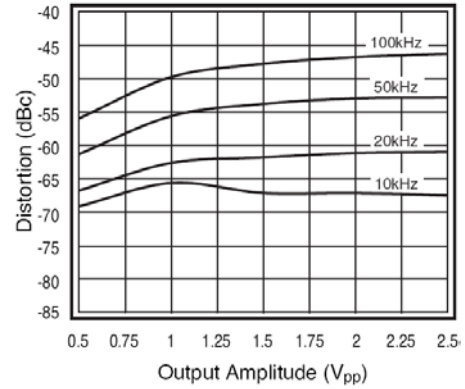

**Figure 14. 2nd Harmonic Distortion vs.  $V_O$**

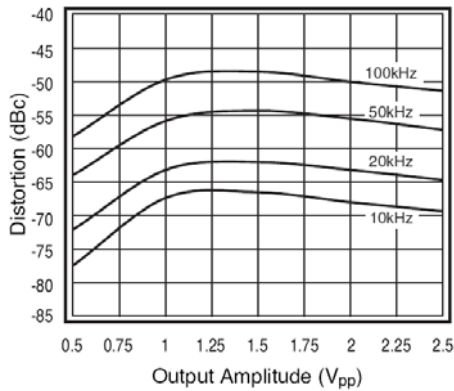


**Figure 15. 3rd Harmonic Distortion vs.  $V_O$**

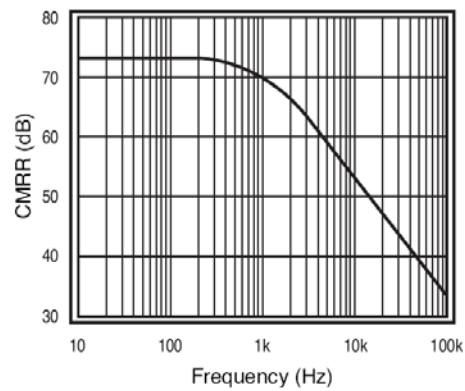


**Figure 16. CMRR  $V_S = 5\text{ V}$**

**TYPICAL PERFORMANCE CHARACTERISTICS**


( $V_S = +2.7\text{ V}$ ,  $G = 2$ ,  $R_L = 10\text{ K}\Omega$  TO  $V_S / 2$ ,  $R_F = 5\text{ K}\Omega$ ; UNLESS OTHERWISE NOTED) (CONTINUED)

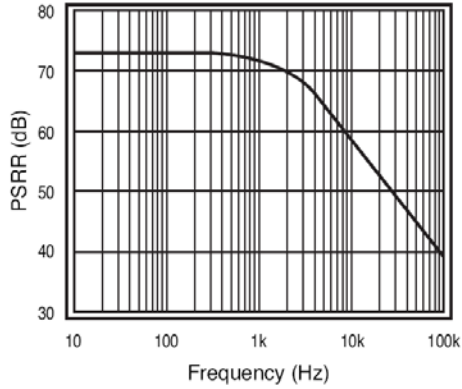


**Figure 17. PSRR  $V_S = 5\text{ V}$**

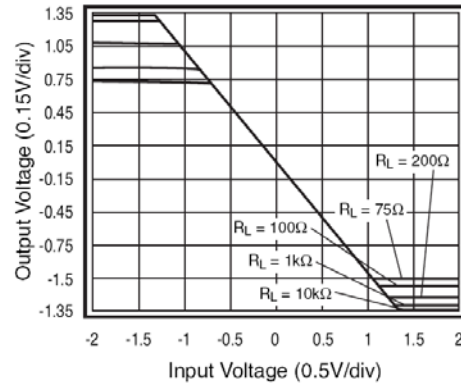

**Figure 18. Output Swing vs. Load**

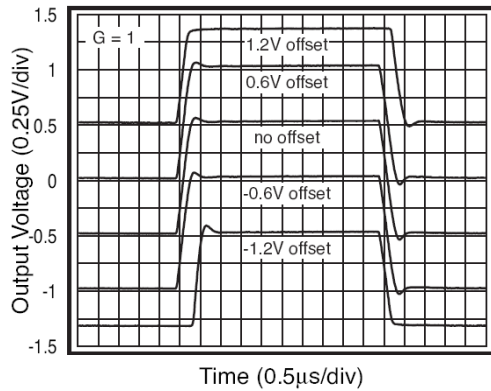

**Figure 19. Pulse Response vs. Common-Mode Voltage**

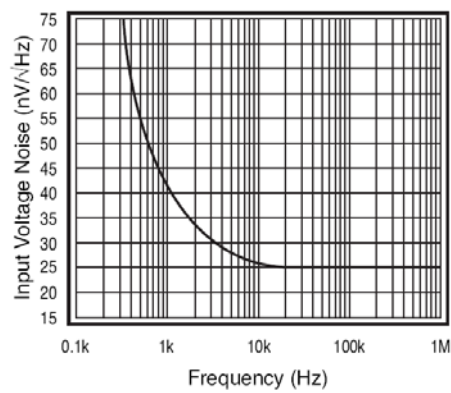

**Figure 20. Input Voltage Noise**

## APPLICATION INFORMATION

### General Description

The FAN4174 amplifier includes single-supply, general-purpose, voltage-feedback amplifiers, fabricated on a bi-CMOS process. The family features a rail-to-rail input and output and is unity gain stable. The typical non-inverting circuit schematic is shown in Figure 21.

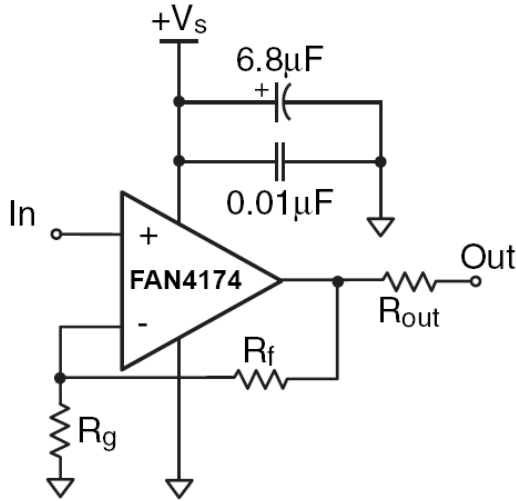


Figure 21. Typical Non-inverting Configuration

### Input Common Mode Voltage

The common mode input range extends to 300 mV below ground and to 100 mV above  $V_S$  in single supply operation. Exceeding these values does not cause phase reversal; however, if the input voltage exceeds the rails by more than 0.5 V, the input ESD devices begin to conduct. The output stays at the rail during this overdrive condition. If the absolute maximum input  $V_{IN}$  (700 mV beyond either rail) is exceeded, externally limit the input current to  $\pm 5$  mA, as shown in Figure 22.

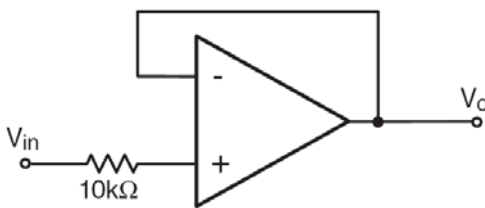


Figure 22. Circuit for Input Current Protection

### Power Dissipation

The maximum internal power dissipation allowed is directly related to the maximum junction temperature. If the maximum junction temperature exceeds 150°C, performance degradation occurs. If the maximum junction temperature exceeds 150°C for an extended time, device failure may occur.

### Overdrive Recovery

Overdrive of an amplifier occurs when the output and/or input ranges are exceeded. The recovery time varies based on whether the input or output is overdriven and by how much the range is exceeded. The FAN4174 typically recovers in less than 500 ns from an overdrive condition. Figure 23 shows the FAN4174 amplifier in an overdriven condition.

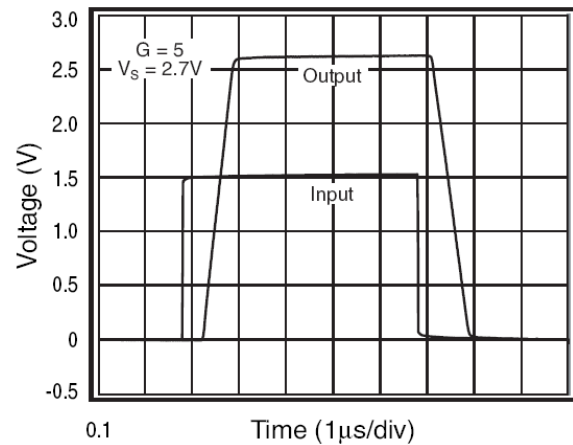


Figure 23. Overdrive Recovery

### Driving Capacitive Loads

Figure 9 illustrates the response of the FAN4174 amplifier. A small series resistance ( $R_S$ ) at the output of the amplifier, illustrated in Figure 24, improves stability and settling performance.  $R_S$  values in Figure 9 achieve maximum bandwidth with less than 2 dB of peaking. For maximum flatness, use a larger  $R_S$ . Capacitive loads larger than 500 pF require the use of  $R_S$ .

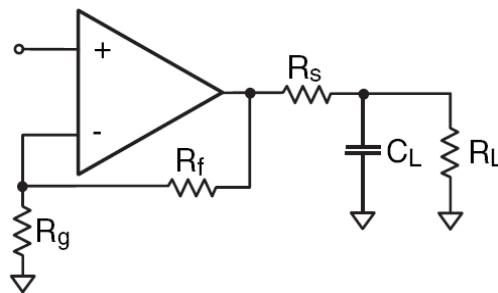


Figure 24. Typical Topology for Driving a Capacitive Load

Driving a capacitive load introduces phase-lag into the output signal, which reduces phase margin in the amplifier. The unity gain follower is the most sensitive configuration. In a unity gain follower configuration, the FAN4174 amplifier requires a 300  $\Omega$  series resistor to drive a 100 pF load.

## LAYOUT CONSIDERATIONS

General layout and supply bypassing play major roles in high-frequency performance. **onsemi** evaluation boards help guide high-frequency layout and aid in device testing and characterization. Follow the steps below as a basis for high-frequency layout:

1. Include 6.8  $\mu\text{F}$  and 0.01  $\mu\text{F}$  ceramic capacitors.
2. Place the 6.8  $\mu\text{F}$  capacitor within 19.05 mm (0.75 inches) of the power pin.
3. Place the 0.01  $\mu\text{F}$  capacitor within 2.54 mm (0.1 inches) of the power pin.
4. Remove the ground plane under and around the part, especially near the input and output pins, to reduce parasitic capacitance.

Minimize all trace lengths to reduce series inductances.

Refer to the evaluation board layouts shown in Figure 27 through Figure 30 for more information.

When evaluating only one channel, complete the following on the unused channel:

1. Ground the non-inverting input.
2. Short the output to the inverting input.


## EVALUATION BOARD INFORMATION

The following evaluation boards are available to aid in the testing and layout of this device:


**Table 1.**

| Board  | Description                                     | Product      |
|--------|-------------------------------------------------|--------------|
| KEB002 | Single Channel, Dual Supply, 5 and 6-Lead SOT23 | FAN4174IS5X  |
| KEB010 | Dual Channel, Dual Supply 8-Lead MSOP           | FAN4274IMU8X |

Evaluation board schematics are shown in Figure 25 and Figure 26; layouts are shown in Figure 27 through Figure 30.

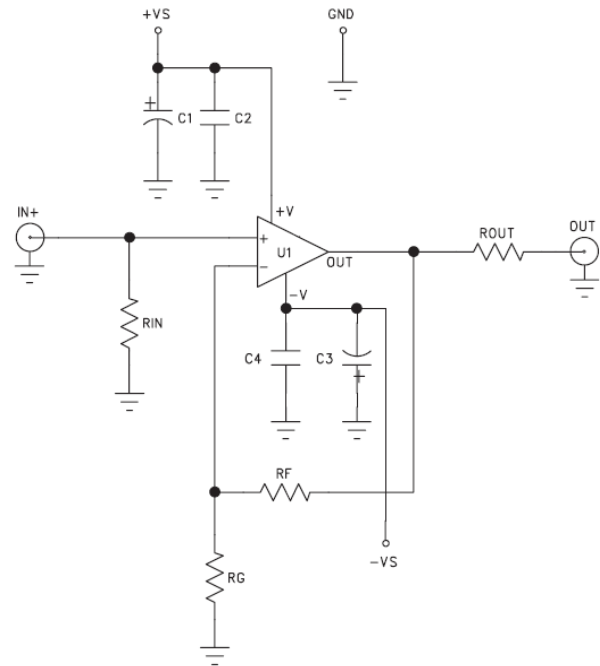

**Figure 25. FAN4174 Evaluation Board Schematic (KEV002)**

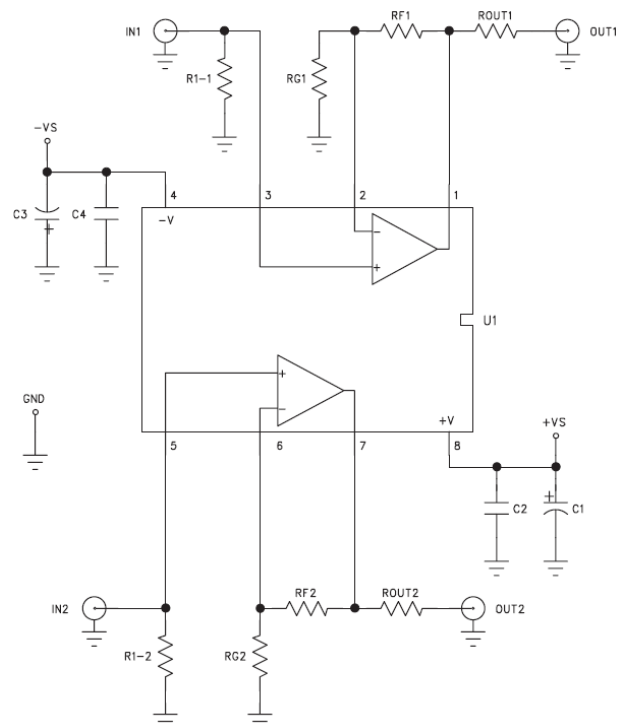

**Figure 26. FAN4274 Evaluation Board Schematic (KEB010)**

BOARD LAYOUT INFORMATION

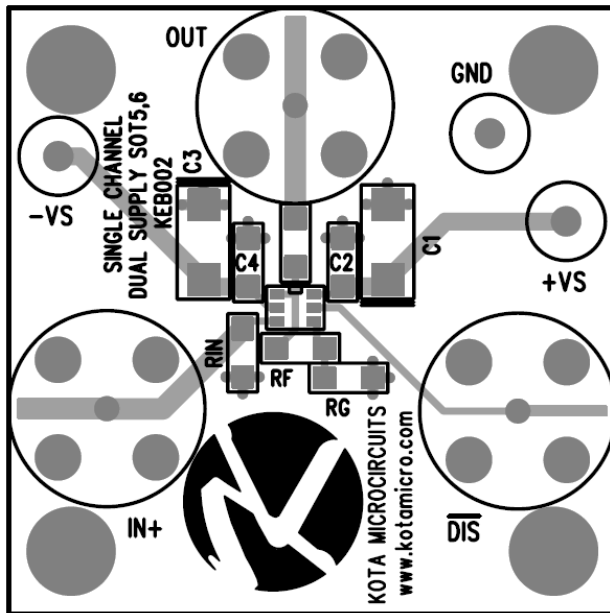


Figure 27. KEB002 (Top Side)

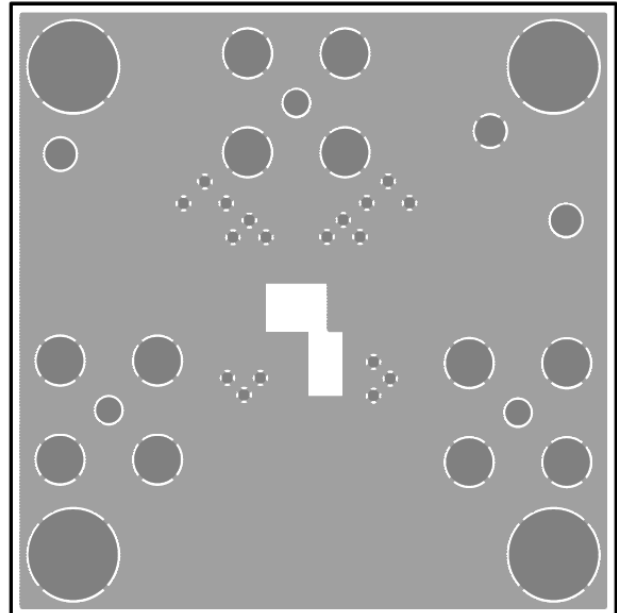


Figure 28. KEB002 (Bottom Side)

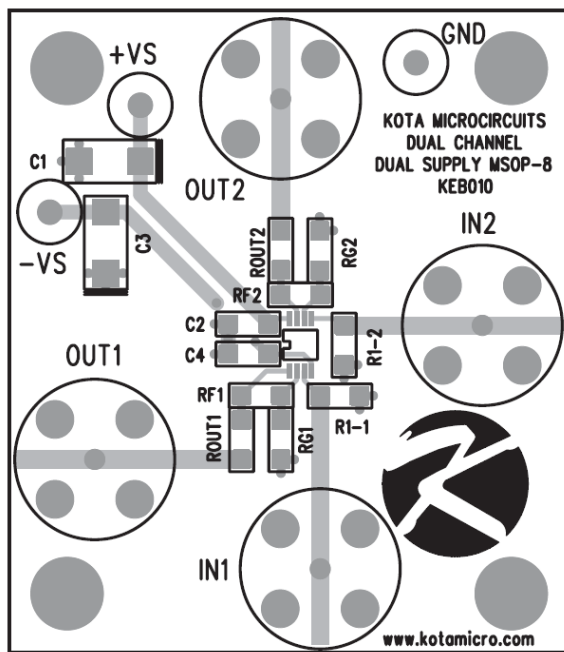


Figure 29. KEB010 (Top Side)

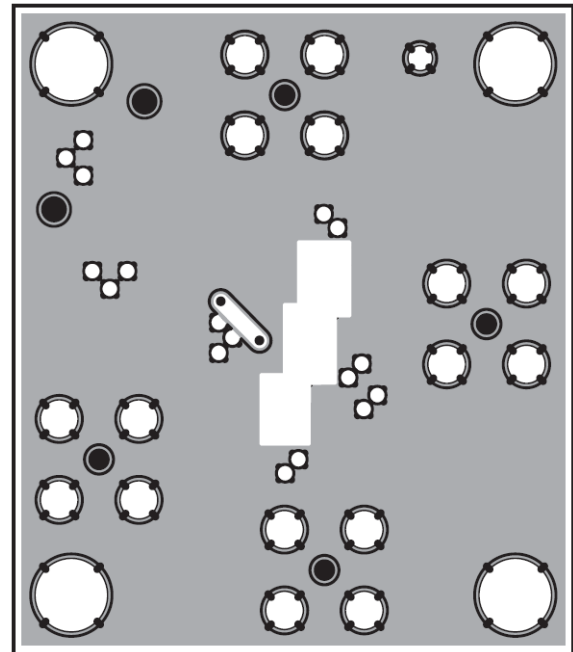



Figure 30. KEB010 (Bottom Side)

## FAN4174, FAN4274


### ORDERING INFORMATION

| Device       | Operating Temperature Range | Package                                        | Shipping <sup>†</sup> |
|--------------|-----------------------------|------------------------------------------------|-----------------------|
| FAN4174IS5X  | –40 to +125°C               | SOT–23, 5 Lead<br>(Pb–Free)                    | 3000 / Tape & Reel    |
| FAN4274IMU8X | –40 to +125°C               | Micro8, Lead Molded Small–Outline<br>(Pb–Free) | 3000 / Tape & Reel    |

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, [BRD8011/D](#).


**SOT-23, 5 Lead**  
**CASE 527AH**  
**ISSUE A**

DATE 09 JUN 2021

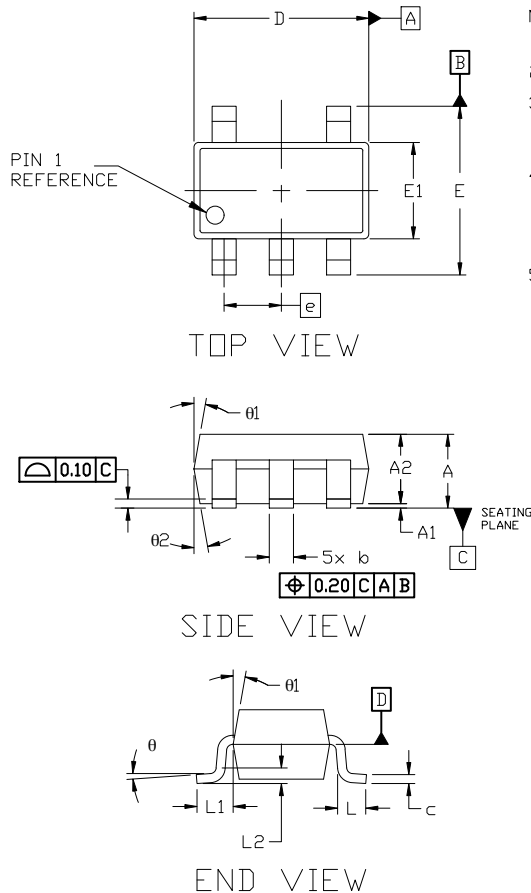

XXX = Specific Device Code  
M = Date Code

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "▪", may or may not be present. Some products may not follow the Generic Marking.

## NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1989A
2. CONTROLLING DIMENSION: MILLIMETERS
3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF THE BASE MATERIAL.
4. DIMENSIONS D AND E1 DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS. MOLD FLASH, PROTRUSIONS, OR GATE BURRS SHALL NOT EXCEED 0.25 PER SIDE. D AND E1 DIMENSIONS ARE DETERMINED AT DATUM D.
5. DIMENSION 'b' DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08mm TOTAL IN EXCESS OF THE 'b' DIMENSION AT MAXIMUM MATERIAL CONDITION. MINIMUM SPACE BETWEEN PROTRUSION AND AN ADJACENT LEAD SHALL NOT BE LESS THAN 0.07mm.

| DIM | MILLIMETERS |      |      |
|-----|-------------|------|------|
|     | MIN.        | NOM. | MAX. |
| A   | 0.90        | —    | 1.45 |
| A1  | 0.00        | —    | 0.15 |
| A2  | 0.90        | 1.15 | 1.30 |
| b   | 0.30        | —    | 0.50 |
| c   | 0.08        | —    | 0.22 |
| D   | 2.90 BSC    |      |      |
| E   | 2.80 BSC    |      |      |
| E1  | 1.60 BSC    |      |      |
| e   | 0.95 BSC    |      |      |
| L   | 0.30        | 0.45 | 0.60 |
| L1  | 0.60 REF    |      |      |
| L2  | 0.25 REF    |      |      |
| θ   | 0°          | 4°   | 8°   |
| θ1  | 0°          | 10°  | 15°  |
| θ2  | 0°          | 10°  | 15°  |


**RECOMMENDED**  
**MOUNTING FOOTPRINT**

For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

|                         |                       |                                                                                                                                                                                  |
|-------------------------|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DOCUMENT NUMBER:</b> | <b>98AON34320E</b>    | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| <b>DESCRIPTION:</b>     | <b>SOT-23, 5 LEAD</b> | <b>PAGE 1 OF 1</b>                                                                                                                                                               |


onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.



SCALE 2:1


Micro8  
CASE 846A-02  
ISSUE K

DATE 16 JUL 2020

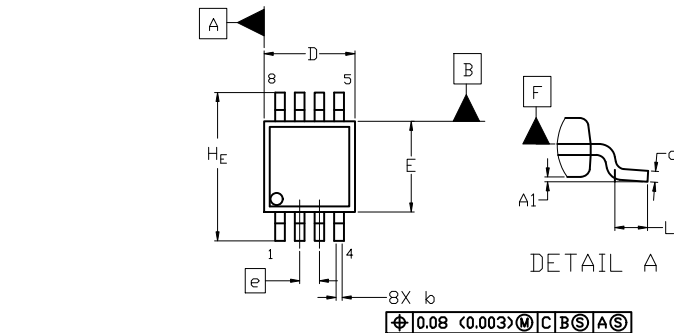


TOP VIEW

NOTE 3

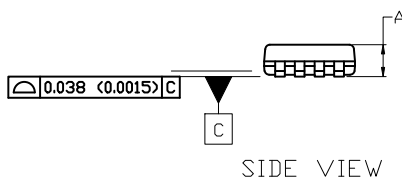


SIDE VIEW



END VIEW

GENERIC  
MARKING DIAGRAM\*




XXXX = Specific Device Code  
A = Assembly Location  
Y = Year  
W = Work Week  
▪ = Pb-Free Package

(Note: Microdot may be in either location)

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "▪", may or may not be present. Some products may not follow the Generic Marking.

NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 2009.
2. CONTROLLING DIMENSION: MILLIMETERS
3. DIMENSION b DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE PROTRUSION SHALL BE 0.10 mm IN EXCESS OF MAXIMUM MATERIAL CONDITION.
4. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSION OR GATE BURRS. MOLD FLASH, PROTRUSIONS, OR GATE BURRS SHALL NOT EXCEED 0.15 mm PER SIDE. DIMENSION E DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 mm PER SIDE. DIMENSIONS D AND E ARE DETERMINED AT DATUM F.
5. DATUMS A AND B ARE TO BE DETERMINED AT DATUM F.
6. A1 IS DEFINED AS THE VERTICAL DISTANCE FROM THE SEATING PLANE TO THE LOWEST POINT ON THE PACKAGE BODY.



RECOMMENDED  
MOUNTING FOOTPRINT

For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERM-10.

| DIM            | MILLIMETERS |      |      |
|----------------|-------------|------|------|
|                | MIN.        | NOM. | MAX. |
| A              | ---         | ---  | 1.10 |
| A1             | 0.05        | 0.08 | 0.15 |
| b              | 0.25        | 0.33 | 0.40 |
| c              | 0.13        | 0.18 | 0.23 |
| D              | 2.90        | 3.00 | 3.10 |
| E              | 2.90        | 3.00 | 3.10 |
| e              | 0.65 BSC    |      |      |
| H <sub>E</sub> | 4.75        | 4.90 | 5.05 |
| L              | 0.40        | 0.55 | 0.70 |

STYLE 1:

- PIN 1. SOURCE
- SOURCE
- SOURCE
- GATE
- DRAIN
- DRAIN
- DRAIN
- DRAIN

STYLE 2:

- PIN 1. SOURCE 1
- GATE 1
- SOURCE 2
- GATE 2
- DRAIN 2
- DRAIN 2
- DRAIN 1
- DRAIN 1

STYLE 3:

- PIN 1. N-SOURCE
- N-GATE
- P-SOURCE
- P-GATE
- P-DRAIN
- P-DRAIN
- N-DRAIN
- N-DRAIN

|                  |             |                                                                                                                                                                                  |
|------------------|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DOCUMENT NUMBER: | 98ASB14087C | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| DESCRIPTION:     | MICRO8      | PAGE 1 OF 1                                                                                                                                                                      |

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

### ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at  
[www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)