




JIANGSU CHANGJING ELECTRONICS TECHNOLOGY CO., LTD.

PDFNWB5×6-8L Plastic-Encapsulate MOSFETS

CJAC100P03 P-Channel Power MOSFET

$V_{(BR)DSS}$	$R_{DS(on)TYP}$	I_D
-30V	2.3mΩ@-10V	-100A
	3.4mΩ@-4.5V	

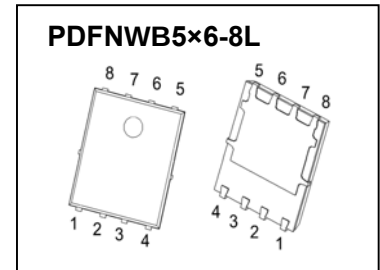

DESCRIPTION

The CJAC100P03 uses advanced trench technology and design to provide excellent $R_{DS(ON)}$ with low gate charge. It can be used in a wide variety of applications


FEATURES

- Battery switch
- Load switch
- High density cell design for ultra low $R_{DS(ON)}$
- Fully characterized avalanche voltage and current
- Good stability and uniformity with high E_{AS}
- Excellent package for good heat dissipation
- Special process technology for high ESD capability

APPLICATIONS

- SMPS and general purpose applications
- Hard switched and high frequency circuits
- Uninterruptible Power Supply

MARKING




CJAC100P03 = Part No.

Solid dot = Pin1 indicator

XX = Code

EQUIVALENT CIRCUIT



MAXIMUM RATINGS ($T_a=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Limit	Unit
Drain-Source Voltage	V_{DS}	-30	V
Gate-Source Voltage	V_{GS}	± 20	V
Continuous Drain Current	$I_D^{(1)}$	-100	A
Pulsed Drain Current	$I_{DM}^{(2)}$	-400	A
Single Pulsed Avalanche Energy	$E_{AS}^{(3)}$	100	mJ
Power Dissipation	$P_D^{(1)}$	104	W
Thermal Resistance from Junction to Ambient	$R_{\theta JA}^{(6)}$	62.5	$^{\circ}\text{C/W}$
Thermal Resistance from Junction to Case	$R_{\theta JC}^{(1)}$	1.2	$^{\circ}\text{C/W}$
Storage and Operating Junction Temperature	T_{stg}, T_J	-55~150	$^{\circ}\text{C}$

MOSFET ELECTRICAL CHARACTERISTICS







$T_a=25^{\circ}\text{C}$ unless otherwise specified

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Off characteristics						
Drain-source breakdown voltage	V _{(BR) DSS}	V _{GS} =0V, I _D =-250μA	-30			V
Zero gate voltage drain current	I _{DSS}	V _{DS} =-24V, V _{GS} =0V			-1	μA
Gate-body leakage current	I _{GSS}	V _{DS} =0V, V _{GS} =±20V			±100	nA
On characteristics ^④						
Gate-threshold voltage	V _{GS(th)}	V _{DS} =V _{GS} , I _D =-250μA	-1.2	-1.6	-2.2	V
Static drain-source on-sate resistance	R _{DS(on)}	V _{GS} =-10V, I _D =-30A		2.3	3.3	mΩ
		V _{GS} =-4.5V, I _D =-20A		3.4	5.0	mΩ
Forward transconductance	g _{FS}	V _{DS} =-10V, I _D =-3A		20		S
Dynamic characteristics ^⑤						
Input capacitance	C _{iss}	V _{DS} =-25V,V _{GS} =0V, f =1MHz		7930	12000	pF
Output capacitance	C _{oss}			985	1300	
Reverse transfer capacitance	C _{rss}			505	750	
Gate resistance	R _g	f =1MHz		3.2		Ω
Switching characteristics ^⑤						
Total gate charge	Q _g	V _{GS} =-10V, V _{DS} =-24V, I _D =-10A		146	210	nC
Gate-source charge	Q _{gs}			22	44	
Gate-drain charge	Q _{gd}			32	64	
Turn-on delay time	t _{d(on)}	V _{DS} =-15V,R _L =5Ω, V _{GS} =-10V,R _G =5Ω		17	34	ns
Turn-on rise time	t _r			61	120	
Turn-off delay time	t _{d(off)}			200	400	
Turn-off fall time	t _f			113	220	
Drain-Source Diode Characteristics						
Drain-source diode forward voltage	V _{SD} ^④	V _{GS} =0V, I _S =-10A			-1.2	V
Continuous drain-source diode forward current	I _S ^①				-100	A
Pulsed drain-source diode forward current	I _{SM} ^②				-400	A



Notes:

1. $T_C=25^{\circ}\text{C}$ Limited only by maximum temperature allowed.
2. $P_W \leq 10\mu s$, Duty cycle $\leq 1\%$.
3. EAS condition: $V_{DD}=-20V, V_{GS}=-10V, L=0.1mH, R_g=25\Omega$ Starting $T_J = 25^{\circ}\text{C}$.
4. Pulse Test : Pulse Width $\leq 300\mu s$, duty cycle $\leq 2\%$.
5. Guaranteed by design, not subject to production.
6. The value of $R_{\theta JA}$ is measured with the device in a still air environment with $T_A=25^{\circ}\text{C}$.



Typical Characteristics

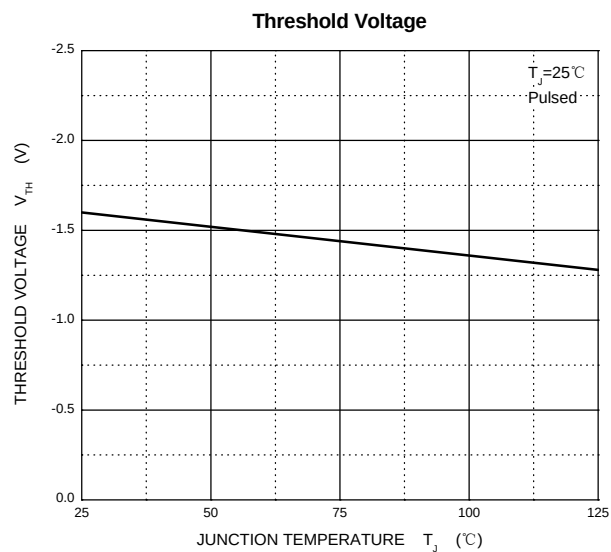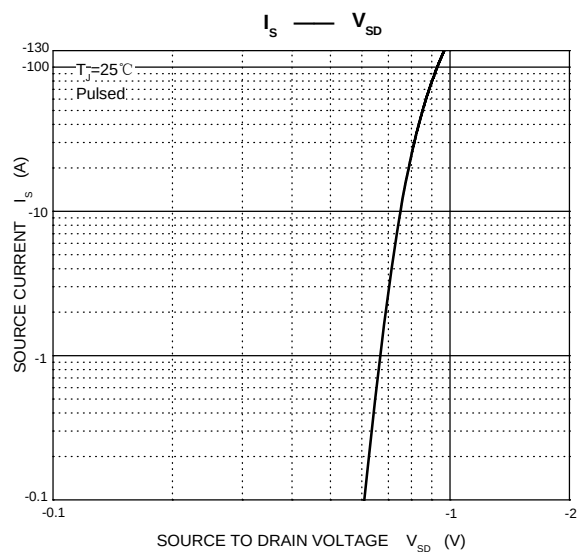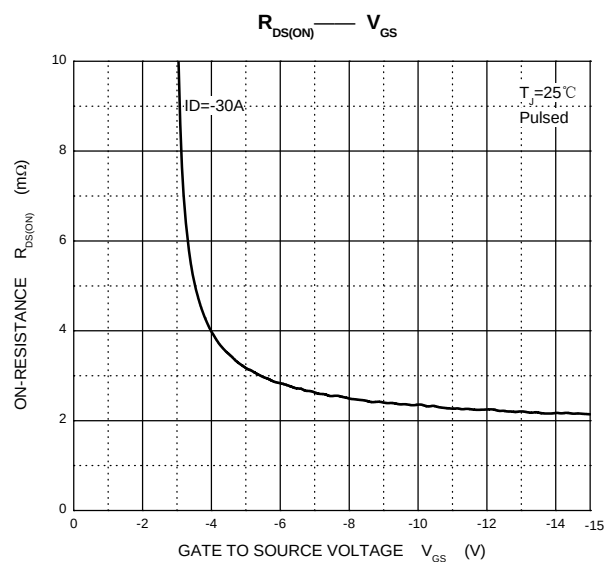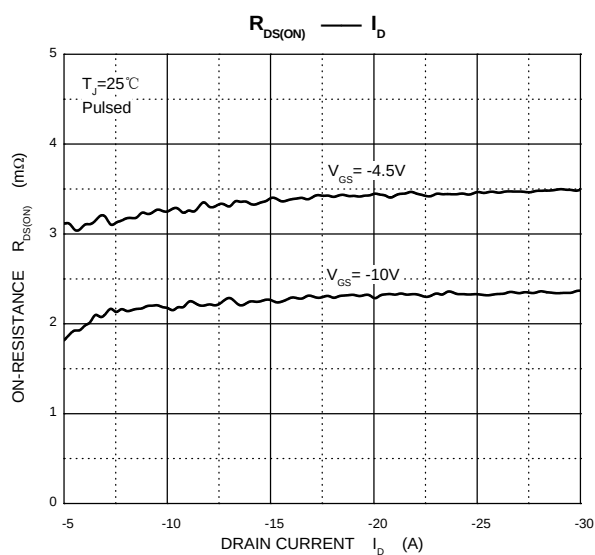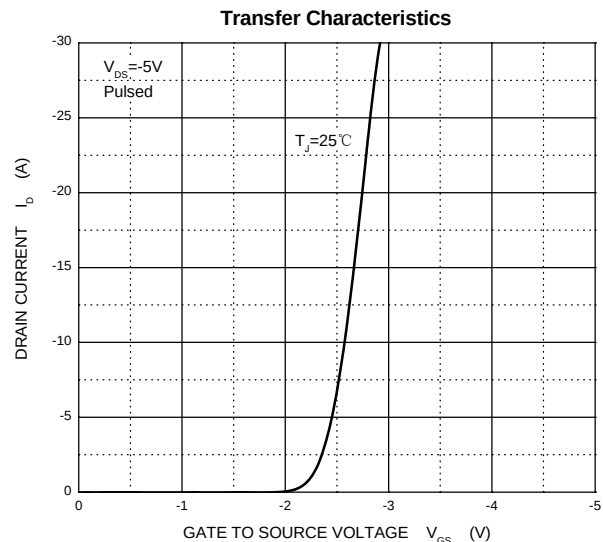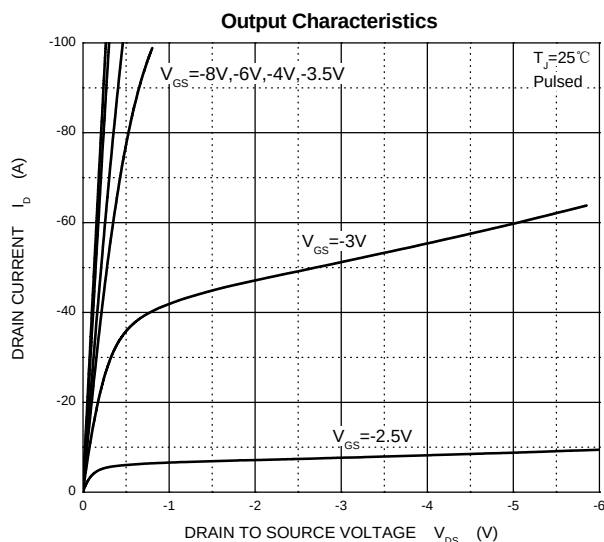

Typical Characteristics

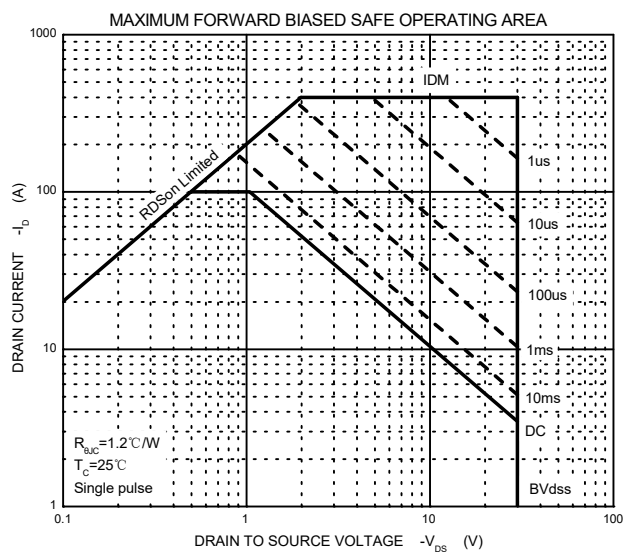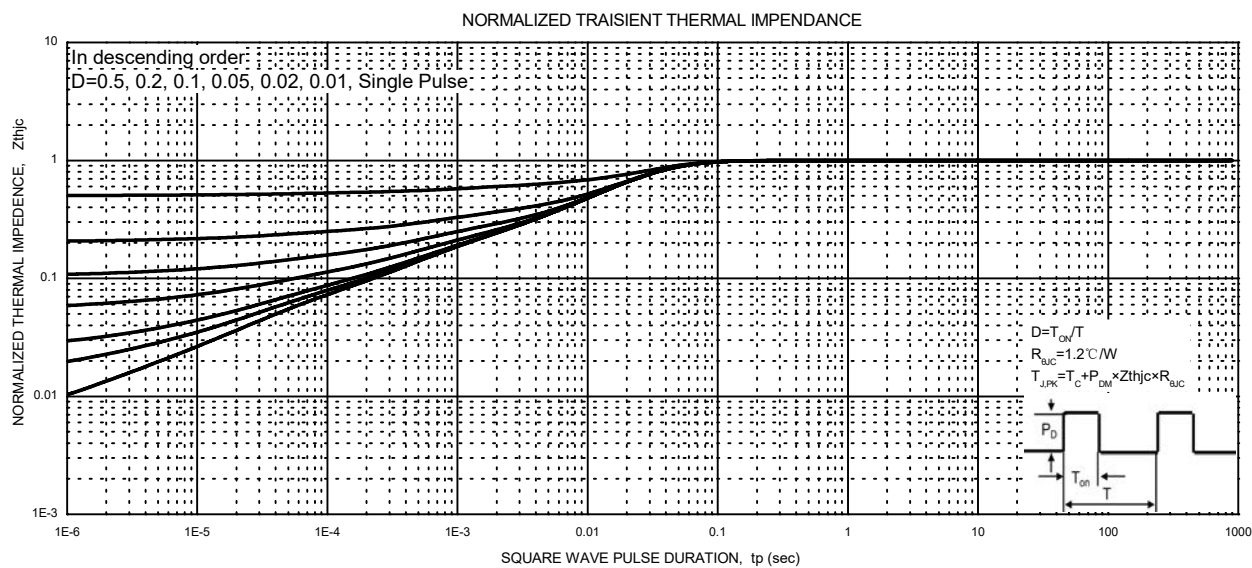


PDFNWB5x6-8L Package Outline Dimensions

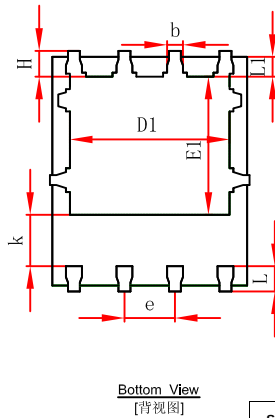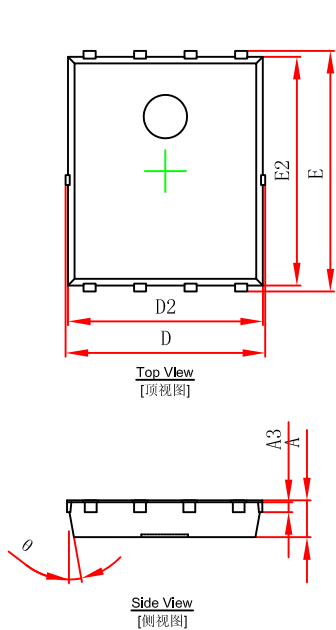

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.000	0.035	0.039
A3	0.254REF.		0.010REF.	
D	4.944	5.096	0.195	0.201
E	5.974	6.126	0.235	0.241
D1	3.910	4.110	0.154	0.162
E1	3.375	3.575	0.133	0.141
D2	4.824	4.976	0.190	0.196
E2	5.674	5.826	0.223	0.229
k	1.190	1.390	0.047	0.055
b	0.350	0.450	0.014	0.018
e	1.270TYP.		0.050TYP.	
L	0.559	0.711	0.022	0.028
L1	0.424	0.576	0.017	0.023
H	0.574	0.726	0.023	0.029
0	10°	12°	10°	12°

PDFNWB5x6-8L Suggested Pad Layout

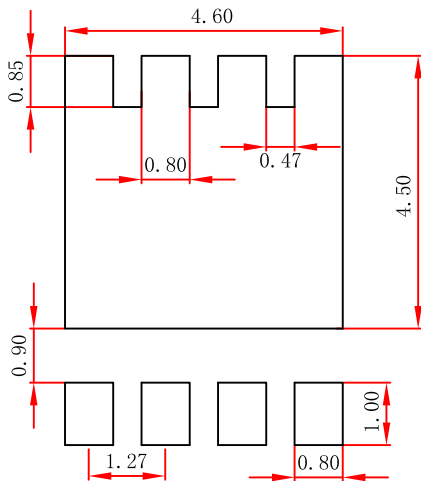


Note:
1.Controlling dimension:in millimeters.
2.General tolerance:±0.05mm.
3.The pad layout is for reference purposes only.

NOTICE

JSCJ reserves the right to make modifications,enhancements,improvements,corrections or other changes without further notice to any product herein. JSCJ does not assume any liability arising out of the application or use of any product described herein.

PDFNWB5×6 Tape and Reel


PDFNWB5×6-8L Embossed Carrier Tape

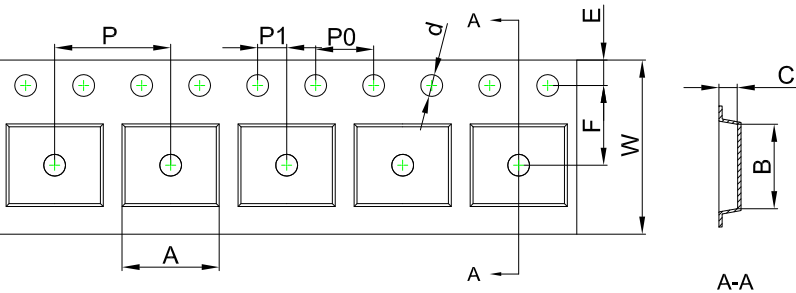


Packaging Description:
PDFNWB5×6-8L parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 5,000 units per 13" or 33.0 cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

Dimensions are in millimeter										
Pkg type	A	B	C	d	E	F	P0	P	P1	W
PDFNWB5×6-8L	6.30	5.30	1.10	Ø1.50	1.75	5.50	4.00	8.00	2.00	12.00

PDFNWB5×6-8L Tape Leader and Trailer

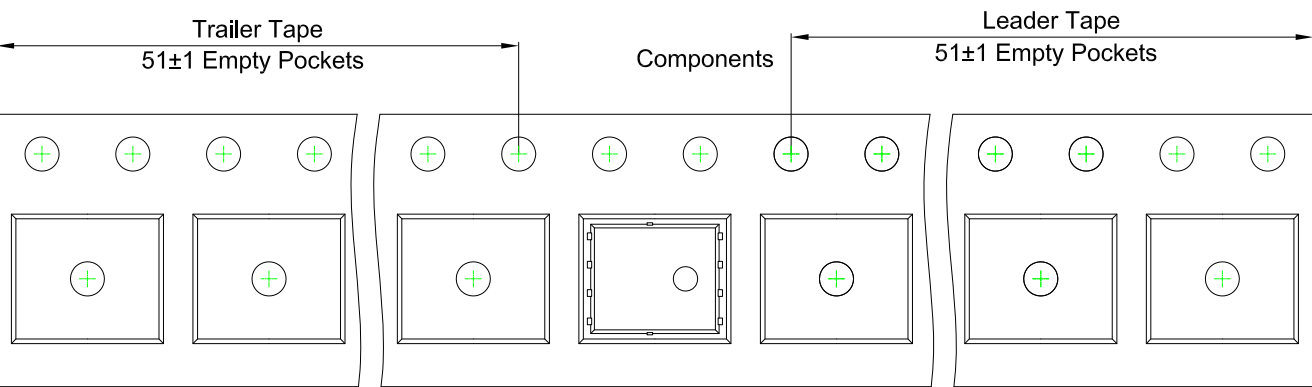

PDFNWB5×6-8L Reel

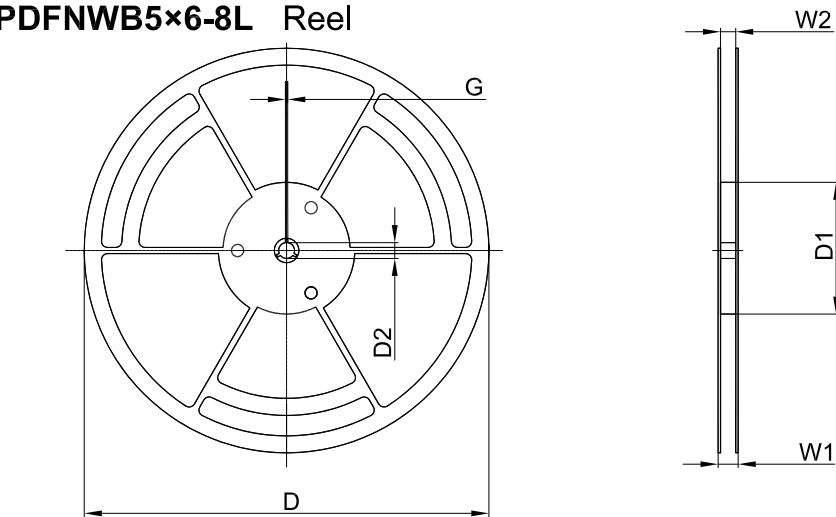

Dimensions are in millimeter						
Reel Option	D	D1	D2	G	W1	W2
13"Dia	Ø330.00	100.00	13.00	1.90	17.60	12.40

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)
5,000 pcs	13 inch	5,000 pcs	340×336×29	50,000 pcs	353×346×365