


Features

- 1) Shorter recovery time
- 2) Reduced temperature dependence
- 3) High-speed switching possible
- 4) Temperature independent switching behavior

Applications

- PFC Boost Topology
- Secondary Side Rectification
- Data Center
- PV Power Conditioners
- DC/DC Converter
- EV Charger

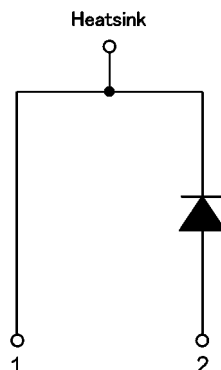

Package

TO-220-2

1: Cathode
2: Anode

Part Number	Marking	Package	V_{RRM}	$I_F, T_c < 135^\circ C$	Q_c
GC3D06060A	GC3D06060	T0220-2	600 V	9 A	15 nC

Maximum Ratings ($T_c = 25^\circ C$ unless otherwise specified)

Symbol	Parameter	Value	Unit	Test Conditions
V_{RRM}	Repetitive Peak Reverse Voltage	600	V	
V_{RSM}	Surge Peak Reverse Voltage	600	V	
V_{DC}	DC Blocking Voltage	600	V	
I_F	Continuous Forward Current	19 9 6	A	$T_c = 25^\circ C$ $T_c = 135^\circ C$ $T_c = 154^\circ C$
I_{FRM}	Repetitive Peak Forward Surge Current	30 20	A	$T_c = 25^\circ C, t_p = 10 \text{ ms}$, Half Sine Wave $T_c = 110^\circ C, t_p = 10 \text{ ms}$, Half Sine Wave
I_{FSM}	Non-Repetitive Peak Forward Surge Current	63 49	A	$T_c = 25^\circ C, t_p = 10 \text{ ms}$, Half Sine Wave $T_c = 110^\circ C, t_p = 10 \text{ ms}$, Half Sine Wave
I_{FMax}	Non-Repetitive Peak Forward Surge Current	540 460	A	$T_c = 25^\circ C, t_p = 10 \mu s$, Pulse $T_c = 110^\circ C, t_p = 10 \mu s$, Pulse
P_{tot}	Power Dissipation	88 38	W	$T_c = 25^\circ C$ $T_c = 110^\circ C$
T_J, T_{stg}	Operating Junction and Storage Temperature	-55 to +175	$^\circ C$	
	TO-220 Mounting Torque	1 8.8	Nm lbf-in	M3 Screw 6-32 Screw

Electrical Characteristics

Symbol	Parameter	Typ.	Max.	Unit	Test Conditions	Note
V_F	Forward Voltage	1.5 2.0	1.7 2.4	V	$I_F = 6\text{ A}$ $T_J = 25^\circ\text{C}$ $I_F = 6\text{ A}$ $T_J = 175^\circ\text{C}$	Fig. 1
I_R	Reverse Current	6.5 13	33 132	μA	$V_R = 600\text{ V}$ $T_J = 25^\circ\text{C}$ $V_R = 600\text{ V}$ $T_J = 175^\circ\text{C}$	Fig. 2
Q_C	Total Capacitive Charge	15		nC	$V_R = 400\text{ V}$, $I_F = 6\text{ A}$ $di/dt = 500\text{ A}/\mu\text{s}$ $T_J = 25^\circ\text{C}$	Fig. 5
C	Total Capacitance	295 28.5 25.5		pF	$V_R = 0\text{ V}$, $T_J = 25^\circ\text{C}$, $f = 1\text{ MHz}$ $V_R = 200\text{ V}$, $T_J = 25^\circ\text{C}$, $f = 1\text{ MHz}$ $V_R = 400\text{ V}$, $T_J = 25^\circ\text{C}$, $f = 1\text{ MHz}$	Fig. 6
E_C	Capacitance Stored Energy	2.3		μJ	$V_R = 400\text{ V}$	Fig. 7


Note: This is a majority carrier diode, so there is no reverse recovery charge.

Thermal Characteristics


Symbol	Parameter	Typ.	Unit	Note
$R_{\theta JC}$	Thermal Resistance from Junction to Case	1.7	$^\circ\text{C}/\text{W}$	Fig. 9

Package Dimensions


Unit: mm

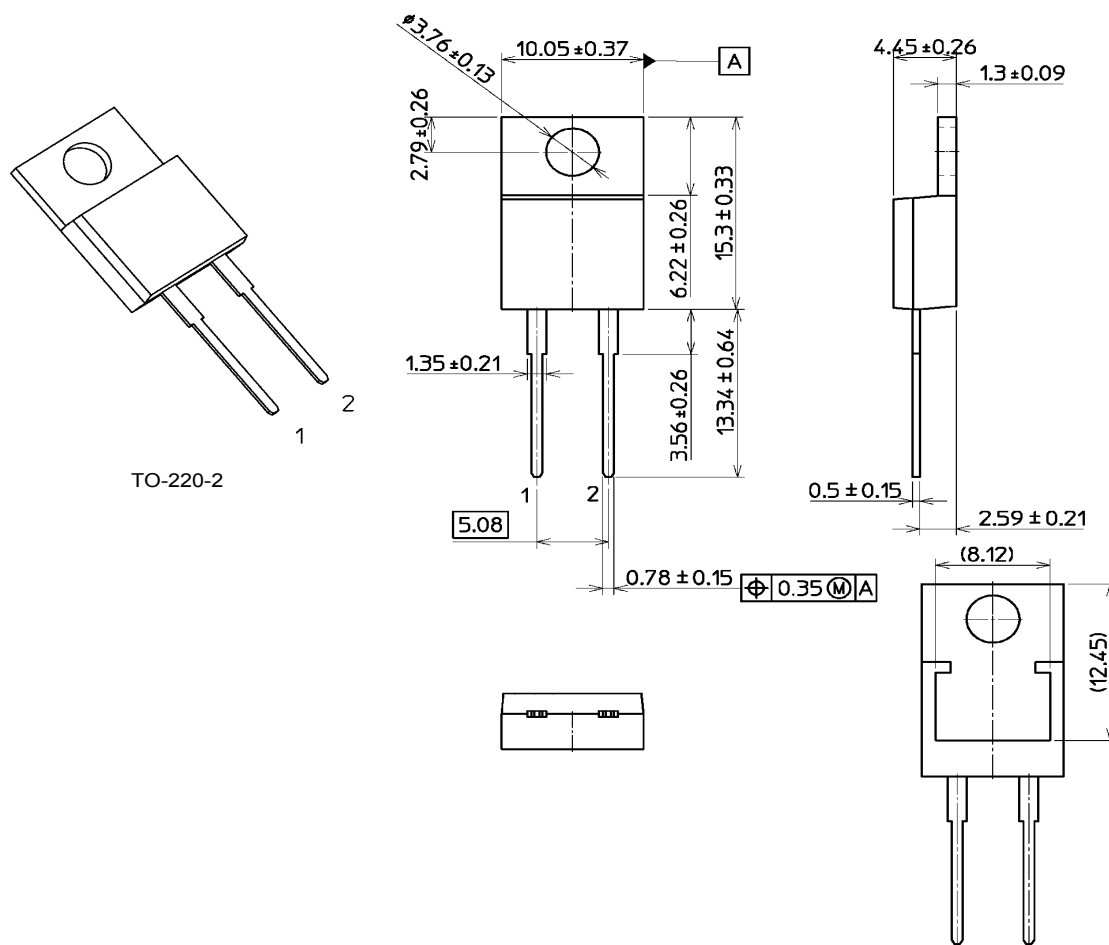

Recommended Solder Pad Layout



Diode Model

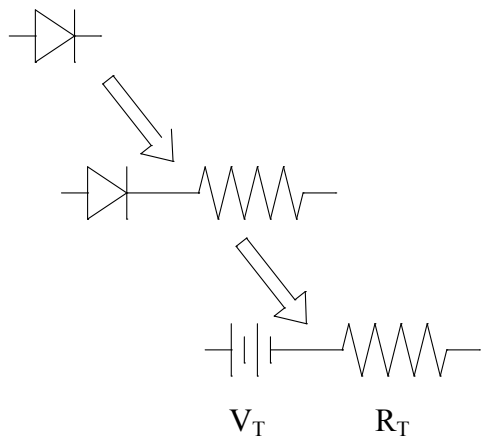

$$V_{fT} = V_T + I_f * R_T$$

$$V_T = 0.96 + (T_J * -1.1 * 10^{-3})$$

$$R_T = 0.07 + (T_J * 7.4 * 10^{-4})$$

Note: T_J = Diode Junction Temperature In Degrees Celsius,
valid from 25°C to 175°C