


Features

- 200W ($t_p=8/20\mu s$) Peak Pulse Power
- Uni-directional configurations
- Low clamping voltage
- Low leakage current
- Moisture sensitivity level: Level 3
- Solid-state silicon avalanche technology
- Meet IEC61000-4-2
Contact discharge $\pm 25kV$
Air discharge $\pm 25kV$



Applications

- Cell Phone Handsets and Accessories
- Microprocessor based equipment
- Personal Digital Assistants (PDA's)
- Notebooks, Desktops, and Servers
- Portable Instrumentation
- Peripherals
- Pagers


Mechanical Data

- SOD-523 package
- Molding compound flammability rating: UL94V-0
- Packaging: Tape and Reel(7 inch)

Agency Approvals

Icon	Description
RoHS	Compliance with (EU)2015/863
HF	Compliance with IEC61249-2-21:2003
	Mean lead free

Schematic & PIN Configuration



Absolute Maximum Ratings (TA=25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Pulse Power($t_p=8/20\mu s$)	P_{PK}	200	W
Peak Pulse Current($t_p=8/20\mu s$)	I_{PP}	9.4	A
Lead Soldering Temperature	T_L	260(10seconds)	°C
Storage Temperature	T_{STG}	-55 to +150	°C
Operating Temperature Range	T_{Op}	-40 to +125	°C


Electrical Characteristics (TA=25°C unless otherwise specified)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Reverse Stand-Off Voltage	V_{RWM}				5.0	V
Breakdown Voltage	V_{BR}	$I_T = 1mA$	6.2			V
Reverse Leakage Current	I_R	$V_{RWM} = 12V$			1	μA
Clamping Voltage	V_C	$I_{PP} = 5A, t_p=8/20\mu s$			11.6	V
Clamping Voltage	V_C	$I_{PP} = 9.4A, t_p=8/20\mu s$			18.6	V
Junction Capacitance	C_J	$V_R = 0V, f = 1MHz$		80		pF

I-V Curve Characteristics

Symbol	Parameter
I_{PP}	Maximum Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
V_{RWM}	Reverse Stand-Off Voltage
I_R	Maximum Reverse Leakage Current @ V_{RWM}
V_{BR}	Breakdown Voltage @ I_T
I_T	Test Current
I_F	Forward Current
V_F	Forward Voltage @ I_F

Note: 8/20 μs pulse waveform.

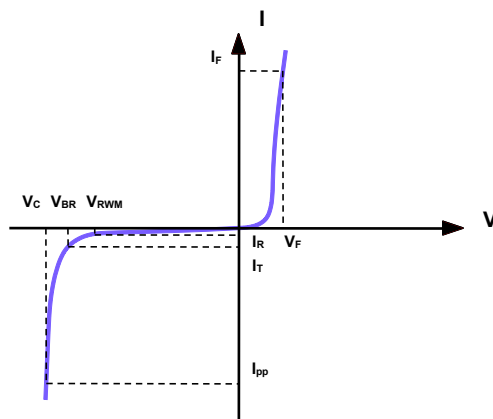

Characteristics Cureves(TA=25°C unless otherwise Specified)

Fig 1. 8/20μs Pulse Waveform



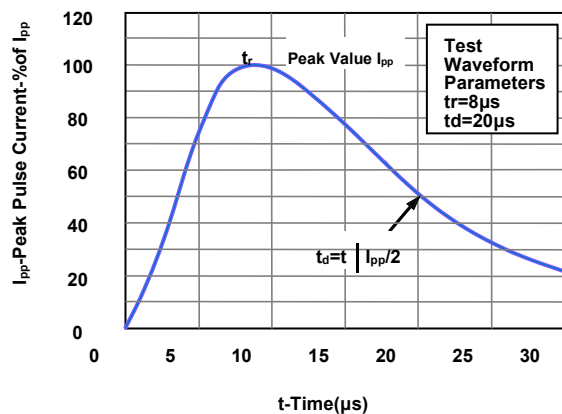


Fig 2. Power Derating Curve

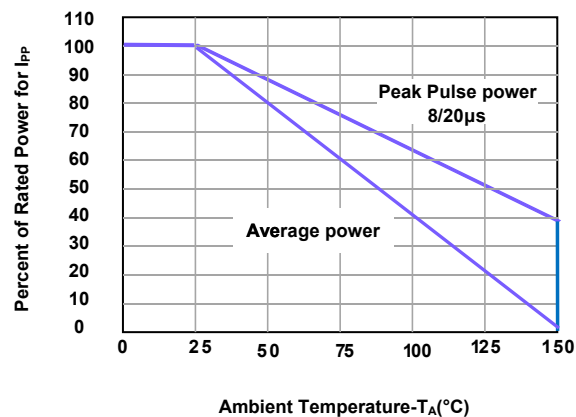


SOD-523 Package Outline

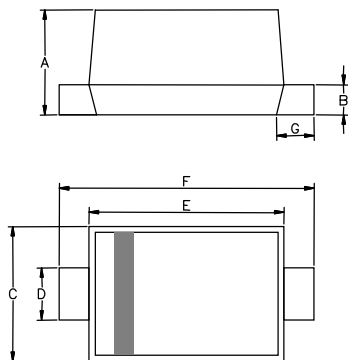

DIM	Millimeters		Inches	
	Min	Max	Min	Max
A	0.50	0.70	0.020	0.028
B	0.07	0.20	0.003	0.008
C	0.70	0.90	0.028	0.035
D	0.25	0.35	0.010	0.014
E	1.10	1.30	0.043	0.051
F	1.50	1.70	0.059	0.067
G	0.15	0.25	0.006	0.010

Marking Information

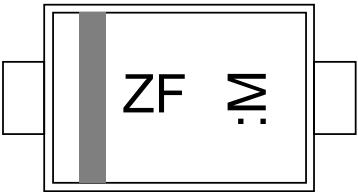


ZF — Type code

:M — Date code

Note: Please take material release date as the production date.

Packaging Information

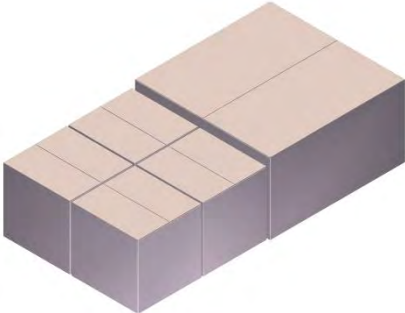	Reel	Inner Box	Carton
Size	φ178mm(7 inch)	215×205×205mm	435×435×230mm
Quantity	MPQ/MOQ: 1 reel=3000pcs	1 Inner box=10 reels=30,000pcs	1Carton=4 Inner boxes=120,000pcs
Photos			

Notice: 1、 Each reel is placed in an aluminum foil bag and vacuum-packed separately.
2、 Above packaging photos make from 3D software for reference only, please refer to actual product as the standard.