

# TinyLogic UHS D-Type, Flip-Flop with Preset and Clear

## NC7SZ74

### Description

The NC7SZ74 is a single, D-type, CMOS flip-flop with preset and clear from onsemi ultra high-speed series of TinyLogic. The device is fabricated with advanced CMOS technology to achieve ultra high speed with high output drive, while maintaining low static power dissipation over a very broad  $V_{CC}$  operating range of 1.65 V to 5.5 V  $V_{CC}$ . The inputs and outputs are high impedance when  $V_{CC}$  is 0 V. Inputs tolerate voltages up to 5.5 V, independent of  $V_{CC}$  operating voltage.

The signal level applied to the D input is transferred to the Q output during the positive-going transition of the CLK pulse.

### Features

- Ultra-High Speed:  $t_{PD}$  2.6 ns (Typical) into 50 pF at 5 V  $V_{CC}$
- High Output Drive:  $\pm 24$  mA at 3 V  $V_{CC}$
- Broad  $V_{CC}$  Operating Range: 1.65 V to 5.5 V
- Power Down High-Impedance Inputs/Outputs
- Over-Voltage Tolerance Inputs Facilitate 5 V to 3 V Translation
- Proprietary Noise/EMI Reduction Circuitry

### CONNECTION DIAGRAM






Figure 1. Logic Symbol




US8  
CASE 846AN




UQFN8  
1.6X1.6, 0.5P  
CASE 523AY

### MARKING DIAGRAMS




SZ74, N9 = Specific Device Code  
A = Assembly Site  
L = Wafer Lot Number  
YW = Assembly Start Wee  
KK = 2-Digit Lot Run Traceability Code  
XY = 2-Digit Date Code Format  
Z = Assembly Plant Code

### PIN CONFIGURATIONS



USB (Top View)



MicroPak™ (Top Through View)

### ORDERING INFORMATION

See detailed ordering and shipping information on page 6 of this data sheet.

NOTE: Some of the devices on this data sheet have been **DISCONTINUED**. Please refer to the table on page 6.

# NC7SZ74

## PIN DEFINITIONS

| Pin # US8 | Pin # MicroPak | Name       | Description         |
|-----------|----------------|------------|---------------------|
| 1         | 7              | CK         | Clock Pulse Input   |
| 2         | 6              | D          | Data Input          |
| 3         | 5              | $\bar{Q}$  | Flip-Flop Output    |
| 4         | 4              | GND        | Ground              |
| 5         | 3              | Q          | Flip-Flop Output    |
| 6         | 2              | CLR        | Direct Clear Input  |
| 7         | 1              | $\bar{PR}$ | Direct Preset Input |
| 8         | 8              | VCC        | Supply Voltage      |

## FUNCTION TABLE

| Inputs |    |   |    | Output |             | Function  |
|--------|----|---|----|--------|-------------|-----------|
| CLR    | PR | D | CK | Q      | $\bar{Q}$   |           |
| L      | H  | X | X  | L      | H           | Clear     |
| H      | L  | X | X  | H      | L           | Preset    |
| L      | L  | X | X  | H      | H           |           |
| H      | H  | L | ↑  | L      | H           |           |
| H      | H  | H | ↑  | H      | L           |           |
| H      | H  | X | ↓  | $Q_n$  | $\bar{Q}_n$ | No Change |

H = HIGH Logic Level

$Q_n$  = No change in data

X = Immaterial

↓ = Falling Edge

L = LOW Logic Level

Z = High Impedance

↑ = Rising Edge

## ABSOLUTE MAXIMUM RATINGS

| Symbol                              | Parameter                                         |                        | Min  | Max  | Unit |
|-------------------------------------|---------------------------------------------------|------------------------|------|------|------|
| V <sub>CC</sub>                     | Supply Voltage                                    |                        | -0.5 | 6.5  | V    |
| V <sub>IN</sub>                     | DC Input Voltage                                  |                        | -0.5 | 6.5  | V    |
| V <sub>OUT</sub>                    | DC Output Voltage                                 |                        | -0.5 | 6.5  | V    |
| I <sub>IK</sub>                     | DC Input Diode Current                            | V <sub>IN</sub> < 0 V  | -    | -50  | mA   |
| I <sub>OK</sub>                     | DC Output Diode Current                           | V <sub>OUT</sub> < 0 V | -    | -50  | mA   |
| I <sub>OUT</sub>                    | DC Output Source/Sink Current                     |                        | -    | ±50  | mA   |
| I <sub>CC</sub> or I <sub>GND</sub> | DC V <sub>CC</sub> or Ground Current              |                        | -    | ±50  | mA   |
| T <sub>STG</sub>                    | Storage Temperature Range                         |                        | -65  | +150 | °C   |
| T <sub>J</sub>                      | Junction Temperature Under Bias                   |                        | -    | +150 | °C   |
| T <sub>L</sub>                      | Junction Lead Temperature (Soldering, 10 Seconds) |                        | -    | +260 | °C   |
| P <sub>D</sub>                      | Power Dissipation in Still Air                    |                        | -    | 500  | mW   |
|                                     |                                                   | US8                    | -    | 539  |      |
|                                     |                                                   | MicroPak-8             | -    |      |      |
| ESD                                 | Human Body Model: JEDEC:JESD22-A114               |                        | -    | 4000 | V    |
|                                     | Charge Device Model: JEDEC:JESD22-C101            |                        | -    | 2000 |      |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

RECOMMENDED OPERATING CONDITIONS

| Symbol                          | Parameter                     | Conditions                            | Min  | Max             | Unit |
|---------------------------------|-------------------------------|---------------------------------------|------|-----------------|------|
| V <sub>CC</sub>                 | Supply Voltage Operating      |                                       | 1.65 | 5.50            | V    |
|                                 | Supply Voltage Data Retention |                                       | 1.50 | 5.50            |      |
| V <sub>IN</sub>                 | Input Voltage                 |                                       | 0    | 5.5             | V    |
| V <sub>OUT</sub>                | Output Voltage                | Active State                          | 0    | V <sub>CC</sub> | V    |
|                                 |                               | 3-State                               | 0    | 5.5             |      |
| t <sub>r</sub> , t <sub>f</sub> | Input Rise and Fall Times     | V <sub>CC</sub> = 1.8 V, 2.5 V ±0.2 V | 0    | 20              | ns/V |
|                                 |                               | V <sub>CC</sub> = 3.3 V ±0.3 V        | 0    | 10              |      |
|                                 |                               | V <sub>CC</sub> = 5.0 V ±0.5 V        | 0    | 5               |      |
| T <sub>A</sub>                  | Operating Temperature         |                                       | -40  | +85             | °C   |
| θ <sub>JA</sub>                 | Thermal Resistance            | US8                                   |      | 250             | °C/W |
|                                 |                               | MicroPak-8                            |      | 232             |      |

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

NOTE: Unused inputs must be held HIGH or LOW. They may not float.

DC ELECTRICAL CHARACTERISTICS

| Symbol           | Parameter                        | V <sub>CC</sub> | Conditions                                                       | T <sub>A</sub> = +25°C |      |                      | T <sub>A</sub> = -40 to +85°C |                      | Units |
|------------------|----------------------------------|-----------------|------------------------------------------------------------------|------------------------|------|----------------------|-------------------------------|----------------------|-------|
|                  |                                  |                 |                                                                  | Min                    | Typ  | Max                  | Min                           | Max                  |       |
| V <sub>IH</sub>  | HIGH Level Control Input Voltage | 1.65 to 1.95    |                                                                  | 0.65 V <sub>CC</sub>   |      |                      | 0.65 V <sub>CC</sub>          |                      | V     |
|                  |                                  | 2.30 to 5.50    |                                                                  | 0.70 V <sub>CC</sub>   |      |                      | 0.70 V <sub>CC</sub>          |                      |       |
| V <sub>IL</sub>  | LOW Level Control Input Voltage  | 1.65 to 1.95    |                                                                  |                        |      | 0.35 V <sub>CC</sub> |                               | 0.35 V <sub>CC</sub> | V     |
|                  |                                  | 2.30 to 5.50    |                                                                  |                        |      | 0.30 V <sub>CC</sub> |                               | 0.30 V <sub>CC</sub> |       |
| V <sub>OH</sub>  | HIGH Level Output Voltage        | 1.65            | V <sub>IN</sub> = V <sub>IH</sub> ,<br>I <sub>OH</sub> = -100 μA | 1.55                   | 1.65 |                      | 1.55                          |                      | V     |
|                  |                                  | 2.30            |                                                                  | 2.20                   | 2.30 |                      | 2.20                          |                      |       |
|                  |                                  | 3.00            |                                                                  | 2.90                   | 3.00 |                      | 2.90                          |                      |       |
|                  |                                  | 4.50            |                                                                  | 4.40                   | 4.50 |                      | 4.40                          |                      |       |
|                  |                                  | 1.65            | I <sub>OH</sub> = -4 mA                                          | 1.29                   | 1.52 |                      | 1.29                          |                      |       |
|                  |                                  | 2.30            | I <sub>OH</sub> = -8 mA                                          | 1.90                   | 2.15 |                      | 1.90                          |                      |       |
|                  |                                  | 3.00            | I <sub>OH</sub> = -16 mA                                         | 2.40                   | 2.80 |                      | 2.40                          |                      |       |
|                  |                                  | 3.00            | I <sub>OH</sub> = -24 mA                                         | 2.30                   | 2.68 |                      | 2.30                          |                      |       |
|                  |                                  | 4.50            | I <sub>OH</sub> = -32 mA                                         | 3.80                   | 4.20 |                      | 3.80                          |                      |       |
| V <sub>OL</sub>  | LOW Level Control Output Voltage | 1.65            | V <sub>IN</sub> = V <sub>IH</sub> ,<br>I <sub>OL</sub> = 100 μA  |                        |      | 0.10                 |                               | 0.10                 | V     |
|                  |                                  | 2.30            |                                                                  |                        |      | 0.10                 |                               | 0.10                 |       |
|                  |                                  | 3.00            |                                                                  |                        |      | 0.10                 |                               | 0.10                 |       |
|                  |                                  | 4.50            |                                                                  |                        |      | 0.10                 |                               | 0.10                 |       |
|                  |                                  | 1.65            | I <sub>OL</sub> = 4 mA                                           |                        | 0.10 | 0.24                 |                               | 0.24                 |       |
|                  |                                  | 2.30            | I <sub>OL</sub> = 8 mA                                           |                        | 0.10 | 0.30                 |                               | 0.30                 |       |
|                  |                                  | 3.00            | I <sub>OL</sub> = 16 mA                                          |                        | 0.15 | 0.40                 |                               | 0.40                 |       |
|                  |                                  | 3.00            | I <sub>OL</sub> = 24 mA                                          |                        | 0.22 | 0.55                 |                               | 0.55                 |       |
|                  |                                  | 4.50            | I <sub>OL</sub> = 32 mA                                          |                        | 0.22 | 0.55                 |                               | 0.55                 |       |
| I <sub>IN</sub>  | Input Leakage Current            | 1.65 to 5.5     | 0 ≤ V <sub>IN</sub> ≤ 5.5 V                                      |                        |      | ±0.1                 |                               | ±1.0                 | μA    |
| I <sub>OFF</sub> | Power Off Leakage Current        | 0               | V <sub>IN</sub> or V <sub>OUT</sub> = 5.5 V                      |                        |      | 1                    |                               | 10                   | μA    |
| I <sub>CC</sub>  | Quiescent Supply Current         | 1.65 to 5.50    | V <sub>IN</sub> = 5.5 V, GND                                     |                        |      | 1                    |                               | 10                   | μA    |


## AC ELECTRICAL CHARACTERISTICS

| Symbol                              | Parameter                                                                             | V <sub>CC</sub> | Conditions                                                                  | T <sub>A</sub> = +25°C |     |      | T <sub>A</sub> = -40 to +85°C |      | Units | Figure               |
|-------------------------------------|---------------------------------------------------------------------------------------|-----------------|-----------------------------------------------------------------------------|------------------------|-----|------|-------------------------------|------|-------|----------------------|
|                                     |                                                                                       |                 |                                                                             | Min                    | Typ | Max  | Min                           | Max  |       |                      |
| f <sub>MAX</sub>                    | Maximum Clock Frequency                                                               | 1.80 ±0.15      | C <sub>L</sub> = 15 pF,<br>R <sub>D</sub> = 1 MΩ,<br>S <sub>1</sub> = Open  | 75                     |     |      | 75                            |      | MHz   | Figure 4<br>Figure 8 |
|                                     |                                                                                       | 2.50 ±0.20      |                                                                             | 150                    |     |      | 150                           |      |       |                      |
|                                     |                                                                                       | 3.30 ±0.30      |                                                                             | 200                    |     |      | 200                           |      |       |                      |
|                                     |                                                                                       | 5.00 ±0.50      |                                                                             | 250                    |     |      | 250                           |      |       |                      |
|                                     |                                                                                       | 3.30 ±0.50      | C <sub>L</sub> = 50 pF,<br>R <sub>D</sub> = 500 Ω,<br>S <sub>1</sub> = Open | 175                    |     |      | 175                           |      |       |                      |
|                                     |                                                                                       | 5.00 ±0.50      |                                                                             | 200                    |     |      | 200                           |      |       |                      |
| t <sub>PLH</sub> , t <sub>PHL</sub> | Propagation Delay<br>CK to Q, $\bar{Q}$                                               | 1.80 ±0.15      | C <sub>L</sub> = 15 pF,<br>R <sub>D</sub> = 1 MΩ,<br>S <sub>1</sub> = Open  |                        | 6.5 | 12.5 |                               | 13.0 | ns    | Figure 4<br>Figure 6 |
|                                     |                                                                                       | 2.50 ±0.20      |                                                                             |                        | 3.8 | 7.5  |                               | 8.0  |       |                      |
|                                     |                                                                                       | 3.30 ±0.30      |                                                                             |                        | 2.8 | 6.5  |                               | 7.0  |       |                      |
|                                     |                                                                                       | 5.00 ±0.50      |                                                                             |                        | 2.2 | 4.5  |                               | 5.0  |       |                      |
|                                     |                                                                                       | 3.30 ±0.30      | C <sub>L</sub> = 50 pF,<br>R <sub>D</sub> = 500 Ω,<br>S <sub>1</sub> = Open |                        | 3.4 | 7.0  |                               | 7.5  |       |                      |
|                                     |                                                                                       | 5.00 ±0.50      |                                                                             |                        | 2.6 | 5.0  |                               | 5.5  |       |                      |
| t <sub>PLH</sub> , t <sub>PHL</sub> | Propagation Delay<br>$\overline{\text{CLR}}$ , $\overline{\text{PR}}$ to Q, $\bar{Q}$ | 1.80 ±0.15      | C <sub>L</sub> = 15 pF,<br>R <sub>L</sub> = 1 MΩ,<br>S <sub>1</sub> = Open  |                        | 6.5 | 14.0 |                               | 14.5 | ns    | Figure 4<br>Figure 6 |
|                                     |                                                                                       | 2.50 ±0.20      |                                                                             |                        | 3.8 | 9.0  |                               | 9.5  |       |                      |
|                                     |                                                                                       | 3.30 ±0.30      |                                                                             |                        | 2.8 | 6.5  |                               | 7.0  |       |                      |
|                                     |                                                                                       | 5.00 ±0.50      |                                                                             |                        | 2.2 | 5.0  |                               | 5.5  |       |                      |
|                                     |                                                                                       | 3.30 ±0.30      | C <sub>L</sub> = 50 pF,<br>R <sub>D</sub> = 500 Ω,<br>S <sub>1</sub> = Open |                        | 3.4 | 7.0  |                               | 7.5  |       |                      |
|                                     |                                                                                       | 5.00 ±0.50      |                                                                             |                        | 2.6 | 5.0  |                               | 5.5  |       |                      |
| t <sub>S</sub>                      | Setup Time CK to D                                                                    | 1.80 ±0.15      | C <sub>L</sub> = 15 pF,<br>R <sub>L</sub> = 1 MΩ,<br>S <sub>1</sub> = Open  | 6.5                    |     |      | 6.5                           |      | ns    | Figure 4<br>Figure 7 |
|                                     |                                                                                       | 2.50 ±0.20      |                                                                             | 3.5                    |     |      | 3.5                           |      |       |                      |
|                                     |                                                                                       | 3.30 ±0.30      |                                                                             | 2.0                    |     |      | 2.0                           |      |       |                      |
|                                     |                                                                                       | 5.00 ±0.50      |                                                                             | 1.5                    |     |      | 1.5                           |      |       |                      |
|                                     |                                                                                       | 3.30 ±0.30      | C <sub>L</sub> = 50 pF,<br>R <sub>D</sub> = 500 Ω,<br>S <sub>1</sub> = Open | 2.0                    |     |      | 2.0                           |      |       |                      |
|                                     |                                                                                       | 5.00 ±0.50      |                                                                             | 1.5                    |     |      | 1.5                           |      |       |                      |
| t <sub>H</sub>                      | Hold Time, CK to D                                                                    | 1.80 ±0.15      | C <sub>L</sub> = 15 pF,<br>R <sub>L</sub> = 1 MΩ,<br>S <sub>1</sub> = Open  | 0.5                    |     |      | 0.5                           |      | ns    | Figure 4<br>Figure 7 |
|                                     |                                                                                       | 2.50 ±0.20      |                                                                             | 0.5                    |     |      | 0.5                           |      |       |                      |
|                                     |                                                                                       | 3.30 ±0.30      |                                                                             | 0.5                    |     |      | 0.5                           |      |       |                      |
|                                     |                                                                                       | 5.00 ±0.50      |                                                                             | 0.5                    |     |      | 0.5                           |      |       |                      |
|                                     |                                                                                       | 3.30 ±0.30      | C <sub>L</sub> = 50 pF,<br>R <sub>D</sub> = 500 Ω,<br>S <sub>1</sub> = Open | 0.5                    |     |      | 0.5                           |      |       |                      |
|                                     |                                                                                       | 5.00 ±0.50      |                                                                             | 0.5                    |     |      | 0.5                           |      |       |                      |
| t <sub>W</sub>                      | Pulse Width, CK,<br>PR, CLR                                                           | 1.80 ±0.15      | C <sub>L</sub> = 15 pF,<br>R <sub>L</sub> = 1 MΩ,<br>S <sub>1</sub> = Open  | 6.0                    |     |      | 6.0                           |      | ns    | Figure 4<br>Figure 8 |
|                                     |                                                                                       | 2.50 ±0.20      |                                                                             | 4.0                    |     |      | 4.0                           |      |       |                      |
|                                     |                                                                                       | 3.30 ±0.30      |                                                                             | 3.0                    |     |      | 3.0                           |      |       |                      |
|                                     |                                                                                       | 5.00 ±0.50      |                                                                             | 2.0                    |     |      | 2.0                           |      |       |                      |
|                                     |                                                                                       | 3.30 ±0.30      | C <sub>L</sub> = 50 pF,<br>R <sub>D</sub> = 500 Ω,<br>S <sub>1</sub> = Open | 3.0                    |     |      | 3.0                           |      |       |                      |
|                                     |                                                                                       | 5.00 ±0.50      |                                                                             | 2.0                    |     |      | 2.0                           |      |       |                      |
| t <sub>REC</sub>                    | Recover Time CLR,<br>PR to CK                                                         | 1.80 ±0.15      | C <sub>L</sub> = 15 pF,<br>R <sub>L</sub> = 1 MΩ,<br>S <sub>1</sub> = Open  | 8.0                    |     |      | 8.0                           |      | ns    | Figure 7             |
|                                     |                                                                                       | 2.50 ±0.20      |                                                                             | 4.5                    |     |      | 4.5                           |      |       |                      |
|                                     |                                                                                       | 3.30 ±0.30      |                                                                             | 3.0                    |     |      | 3.0                           |      |       |                      |
|                                     |                                                                                       | 5.00 ±0.50      |                                                                             | 3.0                    |     |      | 3.0                           |      |       |                      |
|                                     |                                                                                       | 3.30 ±0.30      | C <sub>L</sub> = 50 pF,<br>R <sub>D</sub> = 500 Ω,<br>S <sub>1</sub> = Open | 3.0                    |     |      | 3.0                           |      |       |                      |
|                                     |                                                                                       | 5.00 ±0.50      |                                                                             | 3.0                    |     |      | 3.0                           |      |       |                      |

AC ELECTRICAL CHARACTERISTICS (continued)


| Symbol           | Parameter                              | V <sub>CC</sub> | Conditions | T <sub>A</sub> = +25°C |     |     | T <sub>A</sub> = -40 to +85°C |     | Units | Figure |
|------------------|----------------------------------------|-----------------|------------|------------------------|-----|-----|-------------------------------|-----|-------|--------|
|                  |                                        |                 |            | Min                    | Typ | Max | Min                           | Max |       |        |
| C <sub>IN</sub>  | Input Capacitance                      | 0               |            |                        | 3   |     |                               |     | pF    |        |
| C <sub>OUT</sub> | Output Capacitance                     | 0               |            |                        | 4   |     |                               |     | pF    |        |
| C <sub>PD</sub>  | Power Dissipation Capacitance (Note 1) | 3.30            |            |                        | 10  |     |                               |     | pF    |        |
|                  |                                        | 5.00            |            |                        | 12  |     |                               |     |       |        |

1. C<sub>PD</sub> is defined as the value of the internal equivalent capacitance which is derived from dynamic operating current consumption (I<sub>CCD</sub>) at no output loading and operating at 50% duty cycle. C<sub>PD</sub> is related to I<sub>CCD</sub> dynamic operating current by the expression: I<sub>CCD</sub> = (C<sub>PD</sub>)(V<sub>CC</sub>)(f<sub>IN</sub>) + (I<sub>CCstatic</sub>).

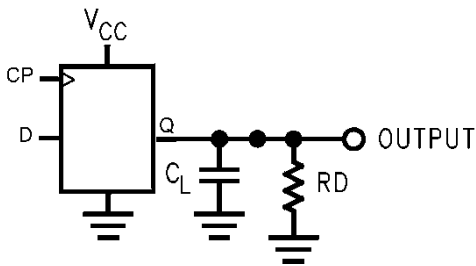

2. C<sub>L</sub> includes load and stray capacitance.  
Input PRR = 1.0 MHz t<sub>w</sub> = 500 ns.

Figure 2. AC Test Circuit

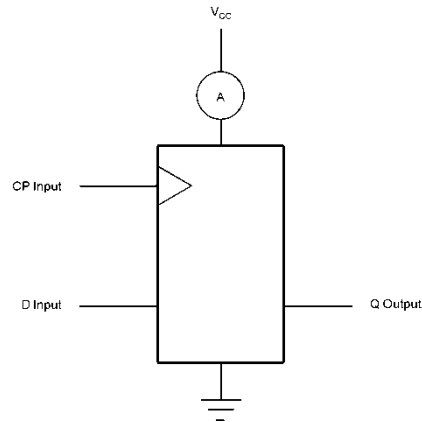

3. CP input = AC Waveforms t<sub>r</sub> = t<sub>f</sub> = 2.5 ns.  
4. CP input PRR = 10 MHz; Duty Cycle = 50%.  
5. D input PRR = 5 MHz; Duty Cycle = 50%.

Figure 3. AC Test Circuit

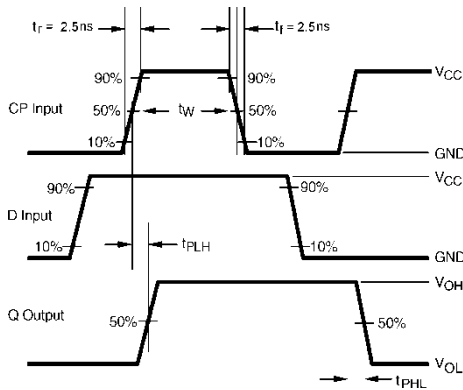


Figure 4. AC Waveforms

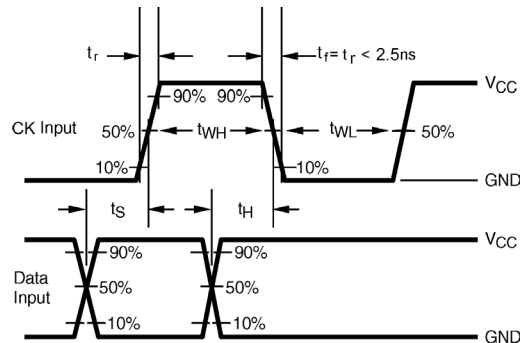


Figure 5. AC Waveforms

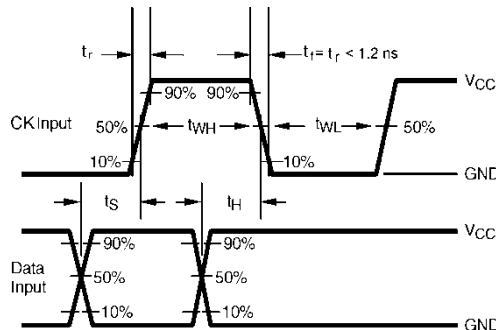


Figure 6. AC Waveforms

## NC7SZ74

### ORDERING INFORMATION

| Part Number | Top Mark | Package                                           | Packing Method†           |
|-------------|----------|---------------------------------------------------|---------------------------|
| NC7SZ74K8X  | SZ74     | 8-Lead US8, JEDEC MO-187, Variation CA 3.1mm Wide | 3000 Units on Tape & Reel |
| NC7SZ74L8X  | N9       | 8-Lead MicroPak, 1.6 mm Wide                      | 5000 Units on Tape & Reel |

### DISCONTINUED (Note 6)

|                   |      |                                                   |                           |
|-------------------|------|---------------------------------------------------|---------------------------|
| NC7SZ74K8X-L22236 | SZ74 | 8-Lead US8, JEDEC MO-187, Variation CA 3.1mm Wide | 3000 Units on Tape & Reel |
| NC7SZ74L8X-L22185 | N9   | 8-Lead MicroPak, 1.6 mm Wide                      | 5000 Units on Tape & Reel |



†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D

6. **DISCONTINUED:** These devices are not recommended for new design. Please contact your **onsemi** representative for information. The most current information on these devices may be available on [www.onsemi.com](http://www.onsemi.com).

MicroPak is a trademark of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries.


**UQFN8 1.6X1.6, 0.5P**  
CASE 523AY  
ISSUE O

DATE 31 AUG 2016

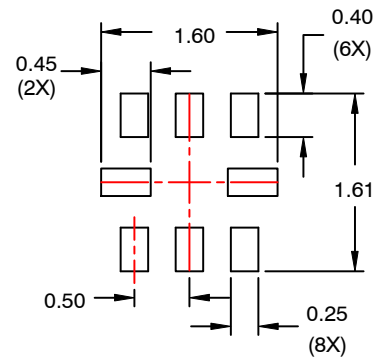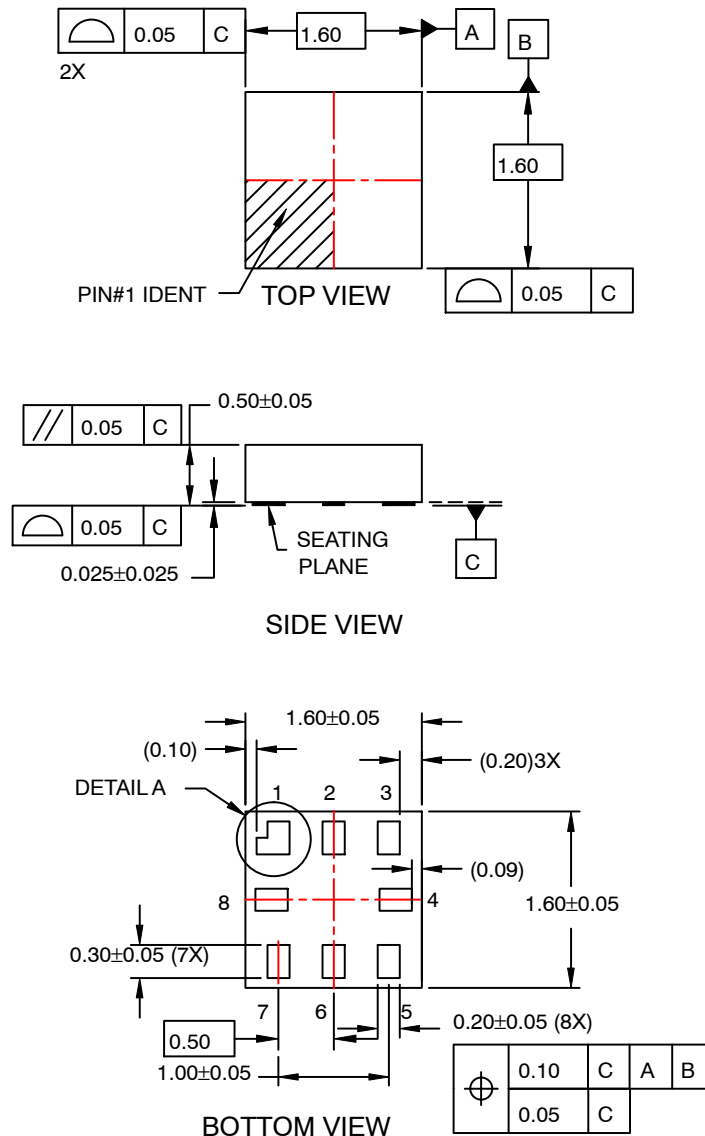

**NOTES:**

- A. PACKAGE CONFORMS TO JEDEC MO-255 VARIATION UAAD.
- B. DIMENSIONS ARE IN MILLIMETERS.
- C. DIMENSIONS AND TOLERANCES PER ASME Y14.5M, 2009.
- D. LAND PATTERN RECOMMENDATION IS EXISTING INDUSTRY LAND PATTERN.


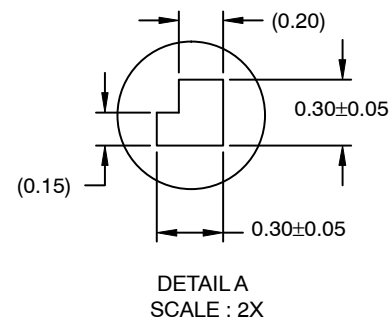


|                         |                            |                                                                                                                                                                                     |
|-------------------------|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DOCUMENT NUMBER:</b> | <b>98AON13591G</b>         | Electronic versions are uncontrolled except when accessed directly from the Document Repository.<br>Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| <b>DESCRIPTION:</b>     | <b>UQFN8 1.6X1.6, 0.5P</b> | <b>PAGE 1 OF 1</b>                                                                                                                                                                  |


onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

**US8**  
CASE 846AN  
ISSUE O


DATE 31 DEC 2016

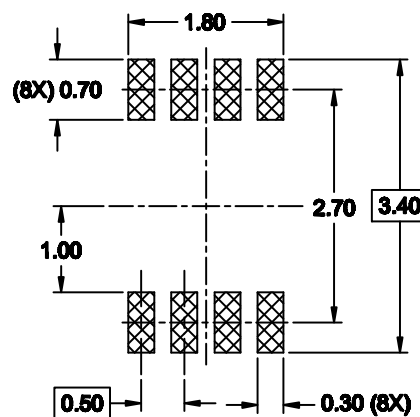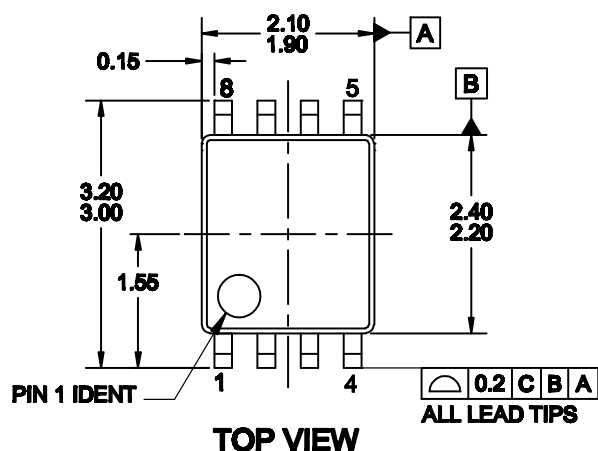

## RECOMMENDED LAND PATTERN

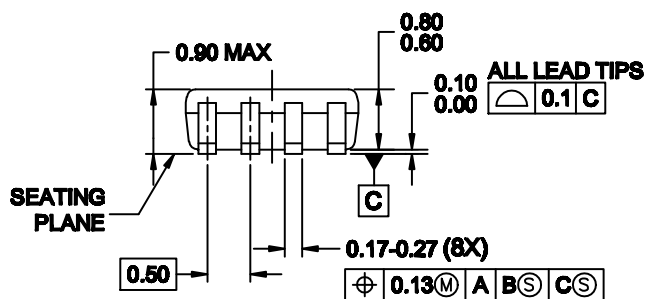


## SIDE VIEW

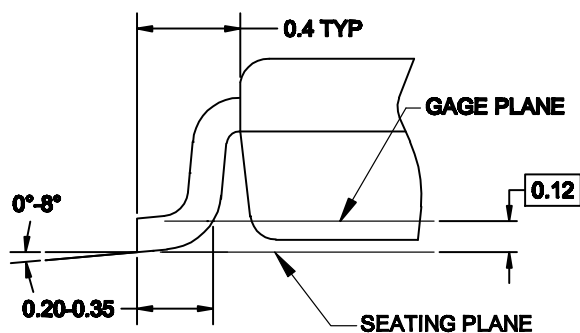

## DETAIL A

**NOTES:**

- A. CONFORMS TO JEDEC REGISTRATION MO-187**
- B. DIMENSIONS ARE IN MILLIMETERS.**
- C. DIMENSIONS ARE EXCLUSIVE OF BURRS,  
MOLD FLASH, AND TIE BAR EXTRUSIONS.**
- D. DIMENSIONS AND TOLERANCES PER  
ANSI Y14.5M, 1994.**

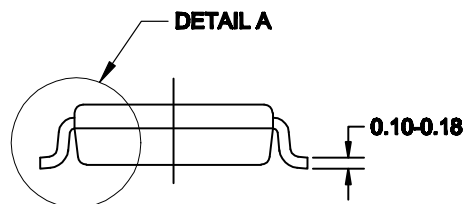

|                         |                    |                                                                                                                                                                                     |
|-------------------------|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DOCUMENT NUMBER:</b> | <b>98AON13778G</b> | Electronic versions are uncontrolled except when accessed directly from the Document Repository.<br>Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| <b>DESCRIPTION:</b>     | <b>US8</b>         | <b>PAGE 1 OF 1</b>                                                                                                                                                                  |

**onsemi** and **onsemi** are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.



**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

### ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at  
[www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)